



Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

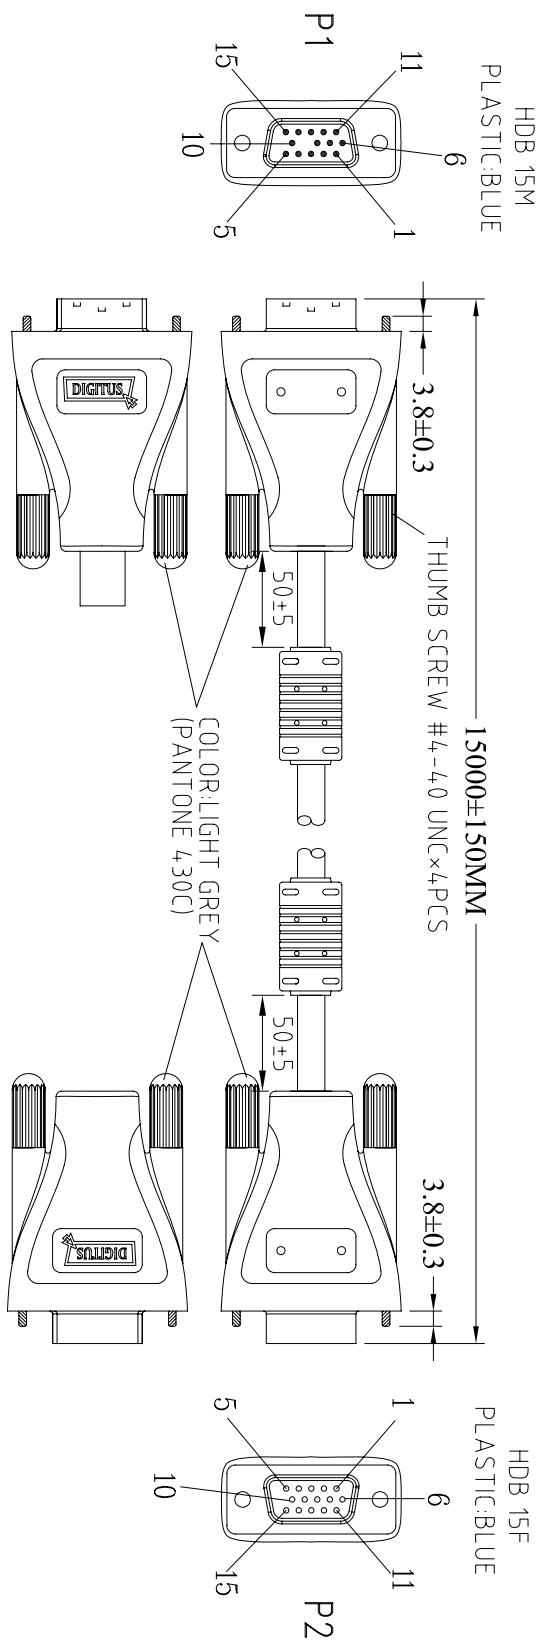

- NOTE:**
- CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL INNER JACKET:PVC OD: 2.5±0.1mm(UL-1354)+28AWG(7/0.127 T.C)
*7C+INSULATION:SR-PVC IDØ 0.9±0.05mm(UL-1061)+AL/MYLAR+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BLACK, OD: 8.5±0.15mm UL-2919 APPROVED.
 - CONNECTOR:
P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD)
P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - FERRITE CORE:17.5*28.5*9.5mm
 - SHIELD:COPPER-FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE BRAID
 - HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK..
 - ELECTRICAL TEST<1>>.100% OPEN SHORT & MIS WIRE TEST <2>.CONTACT RESISTANCE 3 Ohms MAX <3>.INSULATION RESISTANCE 10M Ohms MIN
 - PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

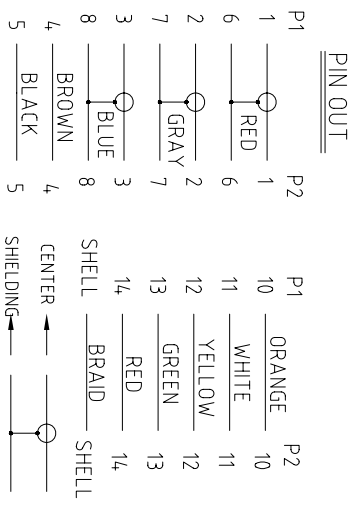

Part No.	DK-113053		
Drawn by	Dec:08,2007	Name	N. Xu
Checked by	Dec:08,2007		ADan
Approved by	Dec:08,2007		T.Aulemann
Title	MORINATOR EXTENTION CABLE VGA MALE TO FEMALE 2 COLOR MOLD WITH DIGITUS LOGO		

RoHS Compliant

1	2	3	4	5	6	7	
H	1	2	3	4	5	6	7
A	HDB 15M PLASTIC:BLUE						H
B	HDB 15F PLASTIC:BLUE						H
C	NOTE: 1.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL INNER JACKET:PVC OD: 2.5±0.1mm(UL-1354)+28AWG(7/0.127 T.C) *7C+INSULATION:SR-PVC IDØ 0.9±0.05mm(UL-1061)+AL/MYLAR+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BLACK, OD: 8.5±0.15mm UL-2919 APPROVED. 2.CONNECTOR: P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD) P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL						H
D	3.FERRITE CORE:17.5*28.5*9.5mm 4.SHIELD:COPPER-FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE BRAID 5.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.. 6.ELECTRICAL TEST<1>>.100% OPEN SHORT & MIS WIRE TEST <2>.CONTACT RESISTANCE 3 Ohms MAX <3>.INSULATION RESISTANCE 10M Ohms MIN 7.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)						H
E	PIN OUT						H
F	P1: 1 RED, 2 GRAY, 3 BLUE, 4 BROWN, 5 BLACK						H
G	P2: 1 ORANGE, 2 YELLOW, 3 GREEN, 4 RED, 5 SHELL						H
H	ASSMANN Electronic GmbH						H
A	Scale: N/A Unit: MM Sheet: 1/1						H