


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec,08,2007	01


IEEE 1394 4M
PLASTIC: BLACK

1000±20

IEEE 1394 4M
PLASTIC: BLACK

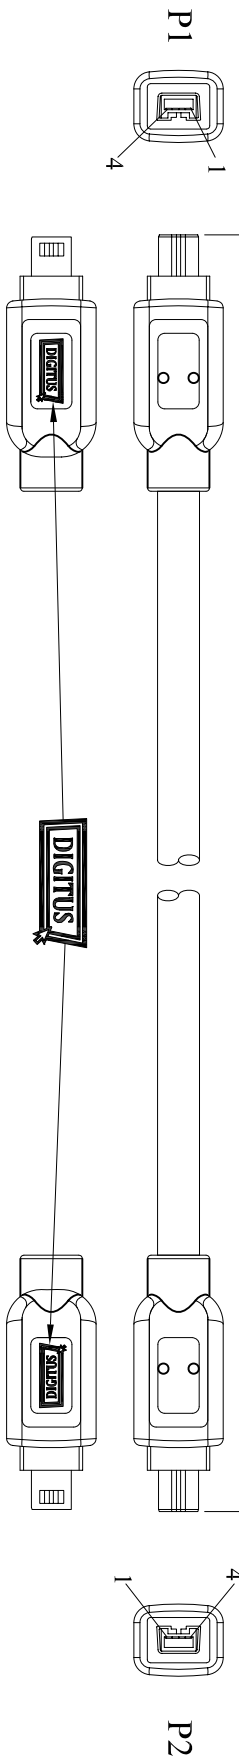

- NOTES:
- 1.CABLE:UL20276 [28AWG(7/0.127 T.C)*1PAIR+AL/MYLAR +SPRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(90%)+PVC JACKET; COLOR:MATT BLACK ,OD:Ø6.0±0.15mm
 - 2.CONNECTOR:P1&P2:IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT; NICKEL PLATED SHELL.
 - 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
 - 4.TEST REQUEST:

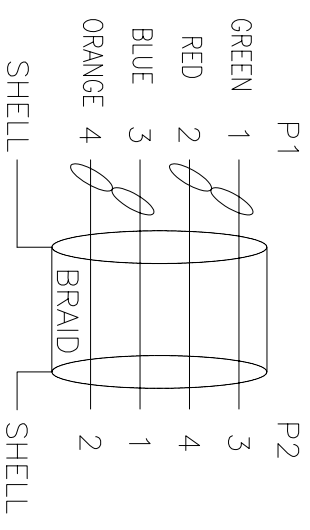

- <1>.100% OPEN SHORT MISS WIRE TEST
- <2>.CONTACT RESISTANCE 3 OHM MAX
- <3>.INSULATION RESISTANCE 10M OHM MIN
- 5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

	Date	Name
Drawn by	Dec,08,2007	N. Xu
Checked by	Dec,08,2007	A.Dan
Approved by	Dec,08,2007	T.Aulemann

ASSMANN
Electronic GmbH

Part No. **DK-115009**

Title
FireWire Cable, Connect, 4Pin-4Pin
2 COLOR MOLD WITH DIGITUS LOGO

Scale N/A
Unit MM

Sheet 1/1

RoHS Compliant

	1	2	3	4	5	6	7													
A	<p>IEEE 1394 4M PLASTIC: BLACK</p> <p>1000±20</p> <p>IEEE 1394 4M PLASTIC: BLACK</p> <p>NOTES:</p> <ol style="list-style-type: none"> 1.CABLE:UL20276 [28AWG(7/0.127 T.C)*1PAIR+AL/MYLAR +SPRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(90%)+PVC JACKET; COLOR:MATT BLACK ,OD:Ø6.0±0.15mm 2.CONNECTOR:P1&P2:IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT; NICKEL PLATED SHELL. 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK. 4.TEST REQUEST: <p><1>.100% OPEN SHORT MISS WIRE TEST</p> <p><2>.CONTACT RESISTANCE 3 OHM MAX</p> <p><3>.INSULATION RESISTANCE 10M OHM MIN</p> <p>5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)</p> <table border="1"> <tr> <td></td> <td>Date</td> <td>Name</td> </tr> <tr> <td>Drawn by</td> <td>Dec,08,2007</td> <td>N. Xu</td> </tr> <tr> <td>Checked by</td> <td>Dec,08,2007</td> <td>A.Dan</td> </tr> <tr> <td>Approved by</td> <td>Dec,08,2007</td> <td>T.Aulemann</td> </tr> </table> <p>ASSMANN Electronic GmbH</p> <p>Part No. DK-115009</p> <p>Title FireWire Cable, Connect, 4Pin-4Pin 2 COLOR MOLD WITH DIGITUS LOGO</p> <p>Scale N/A Unit MM</p> <p>Sheet 1/1</p>								Date	Name	Drawn by	Dec,08,2007	N. Xu	Checked by	Dec,08,2007	A.Dan	Approved by	Dec,08,2007	T.Aulemann	
	Date	Name																		
Drawn by	Dec,08,2007	N. Xu																		
Checked by	Dec,08,2007	A.Dan																		
Approved by	Dec,08,2007	T.Aulemann																		
B																				
C																				
D	<p>NOTES:</p> <ol style="list-style-type: none"> 1.CABLE:UL20276 [28AWG(7/0.127 T.C)*1PAIR+AL/MYLAR +SPRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(90%)+PVC JACKET; COLOR:MATT BLACK ,OD:Ø6.0±0.15mm 2.CONNECTOR:P1&P2:IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT; NICKEL PLATED SHELL. 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK. 4.TEST REQUEST: <p><1>.100% OPEN SHORT MISS WIRE TEST</p> <p><2>.CONTACT RESISTANCE 3 OHM MAX</p> <p><3>.INSULATION RESISTANCE 10M OHM MIN</p> <p>5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)</p>																			
E																				
F	<p>NOTES:</p> <ol style="list-style-type: none"> 1.CABLE:UL20276 [28AWG(7/0.127 T.C)*1PAIR+AL/MYLAR +SPRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(90%)+PVC JACKET; COLOR:MATT BLACK ,OD:Ø6.0±0.15mm 2.CONNECTOR:P1&P2:IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT; NICKEL PLATED SHELL. 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK. 4.TEST REQUEST: <p><1>.100% OPEN SHORT MISS WIRE TEST</p> <p><2>.CONTACT RESISTANCE 3 OHM MAX</p> <p><3>.INSULATION RESISTANCE 10M OHM MIN</p> <p>5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)</p>																			
G	<p>NOTES:</p> <ol style="list-style-type: none"> 1.CABLE:UL20276 [28AWG(7/0.127 T.C)*1PAIR+AL/MYLAR +SPRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(90%)+PVC JACKET; COLOR:MATT BLACK ,OD:Ø6.0±0.15mm 2.CONNECTOR:P1&P2:IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT; NICKEL PLATED SHELL. 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK. 4.TEST REQUEST: <p><1>.100% OPEN SHORT MISS WIRE TEST</p> <p><2>.CONTACT RESISTANCE 3 OHM MAX</p> <p><3>.INSULATION RESISTANCE 10M OHM MIN</p> <p>5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)</p>																			
H	<p>NOTES:</p> <ol style="list-style-type: none"> 1.CABLE:UL20276 [28AWG(7/0.127 T.C)*1PAIR+AL/MYLAR +SPRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(90%)+PVC JACKET; COLOR:MATT BLACK ,OD:Ø6.0±0.15mm 2.CONNECTOR:P1&P2:IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT; NICKEL PLATED SHELL. 3.HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK. 4.TEST REQUEST: <p><1>.100% OPEN SHORT MISS WIRE TEST</p> <p><2>.CONTACT RESISTANCE 3 OHM MAX</p> <p><3>.INSULATION RESISTANCE 10M OHM MIN</p> <p>5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)</p>																			