




Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec:20,2005	01

5000±100mm

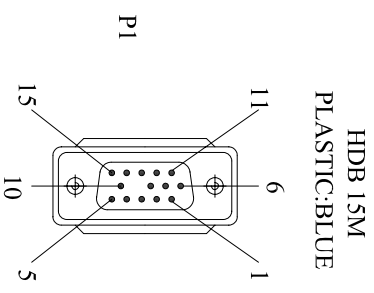

THUMB SCREW:#4-40*4

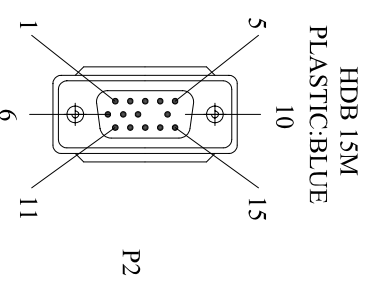

HDB 15M
PLASTIC:BLUE

P1

P2

NOTES:

- 1.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER JACKET:PVC OD:Ø2.5±0.1mm(UL-1354)+28AWG(7/0.127 T.C)*7C+ INSULATION:SR-PVC ID:Ø0.85±0.05mm(UL-1061)+AL/MY+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BEIGE. OD:Ø8.5±0.15mm UL-2919
- 2.CONNECTOR:
P1&P2:HDB 15P MALE,THE 9TH PIN IS EMPTY GOLD FLASH CONTACT, NICKEL PLATED SHELL
- 3.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- 4.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- 5.ELECTRONIC TEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3 OHMS MAX
- <3>.INSULATION RESISTANCE 20M OHMS MIN
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP5.

PIN OUT	
P1	P2
1 — ○ — RED	1 — ○ — ORANGE
2 — ○ — GRAY	2 — ○ — WHITE
3 — ○ — BLUE	3 — ○ — YELLOW
4 — ○ — BROWN	4 — ○ — GREEN
5 — ○ — BLACK	5 — ○ — RED
	6 — ○ — CENTER
	7 — ○ — SHIELDING
	8 — ○ — SHELL
	9 — ○ — BRAID
	10 — ○ — SHELL
	11 — ○ — SHELL
	12 — ○ — SHELL
	13 — ○ — SHELL
	14 — ○ — SHELL
	15 — ○ — SHELL

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.	AK 3770X
Title.	Premium XGA connection cable

RoHS Compliant

EAN Code:
401 6032063629

STR1407

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7
H	G	F	E	D	C	B