


AK-AV506 : 1.5M S-VHS PLUG TO S-VHS PLUG, GOLD PLATED.

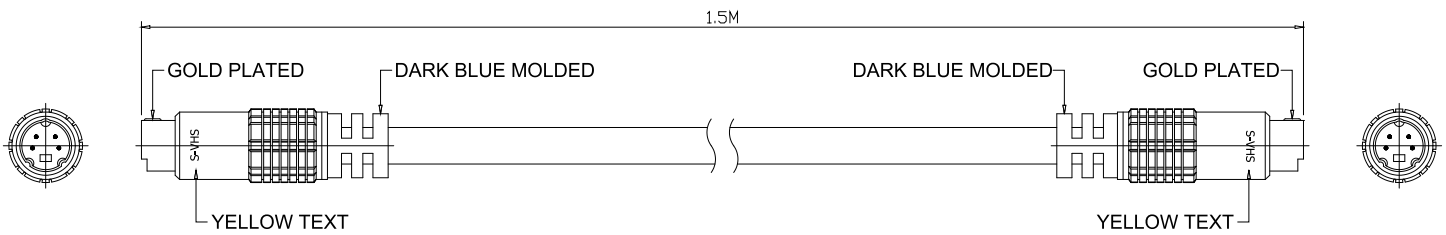


### CABLE CONSTRUCTION

	ITEM		SPEC.
CENTER CONDUCTOR	MATERIAL		COPPER WIRE
	CONSTRUCT	mm/No.	0.16 x 16
	O.D.	mm	0.74 ± 0.05
INSULATION	MATERIAL		PE FOAM
	THICK	mm	0.28 ± 0.10
	O.D.	mm	1.30 ± 0.10
SPIRAL SHIELD	MATERIAL		COPPER WIRE
	CONSTRUCT	mm/No.	0.12 x 36 ± 3
	TYPE		SPIRAL
MIDDLE PVC JACKET	MATERIAL		PVC
	O.D.	mm	2.30 ± 0.10 x 2C
FILLING	MATERIAL		FILLER
PAPER	MATERIAL		PAPER
FOIL	MATERIAL		FOIL
OUTER BRAID SHIELD	MATERIAL		COPPER WIRE
	CONSTRUCT	mm/No.	0.12 x 4 / 16
	TYPE		BRAID
PVC JACKET	MATERIAL		PVC
	O.D.	mm	6.50 ± 0.15
	COLOR		DARK BLUE

AK-AV506 : 1.5M S-VHS PLUG TO S-VHS PLUG, GOLD PLATED.

08.23.2002	original
------------	----------

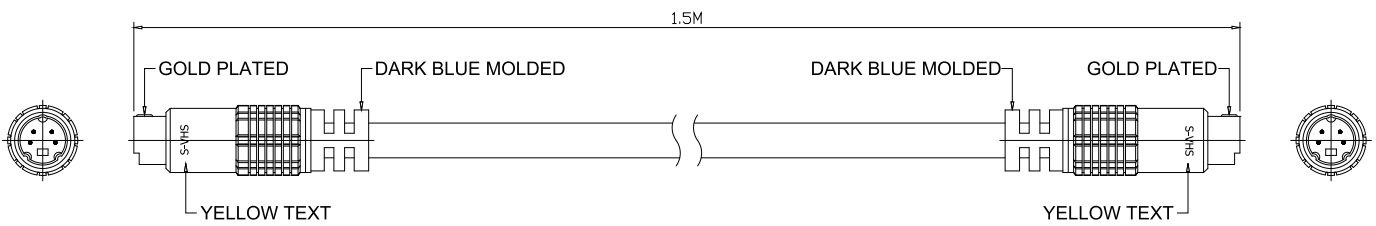

**CABLE CONSTRUCTION**

ITEM		SPEC.
CENTER CONDUCTOR	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.16 x 16
	O.D.	mm 0.74 ± 0.05
INSULATION	MATERIAL	PE FOAM
	THICK	mm 0.28 ± 0.10
	O.D.	mm 1.30 ± 0.10
SPIRAL SHIELD	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.12 x 36 ± 3
	TYPE	SPIRAL
MIDDLE PVC JACKET	MATERIAL	PVC
	O.D.	mm 2.30 ± 0.10 x 2C
FILLING	MATERIAL	FILLER
PAPER	MATERIAL	PAPER
FOIL	MATERIAL	FOIL
OUTER BRAID SHIELD	MATERIAL	COPPER WIRE
	CONSTRUCT	mm/No. 0.12 x 4 / 16
	TYPE	BRAID
PVC JACKET	MATERIAL	PVC
	O.D.	mm 6.50 ± 0.15
	COLOR	DARK BLUE

STANDARD TOLERANCE LIMITS UNLESS OTHER SPECIFIED		
RANGE	TOLERANCE	
	F A	B
0-6	00.06	00.05
6-30	00.1	00.1
30-120	00.2	00.3
120-300	00.3	00.4
300-600	00.4	00.5
600-1200	00.5	00.6

æi	mm	ñÖ	1:1	sí	ý O ü	Éá	AK-AV506	Xíé
ÿk	AT#k	¶/E	1/1	Éá	ASSMANN	A@		
TSAY-E INTERNATIONAL INC.						fÖ		08.23.2002
A@ê~ <sup>3</sup> -½q						ÿi		
						WU		