
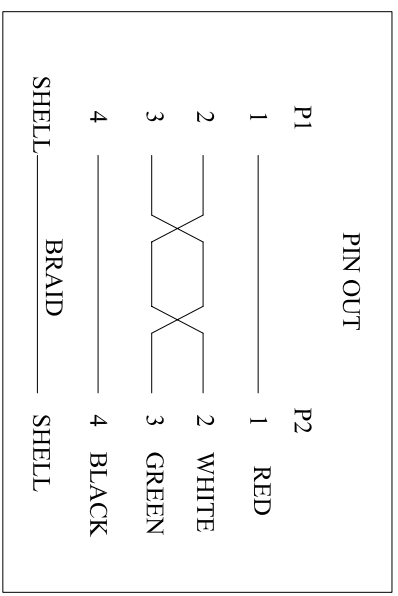


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

2000 ± 50 mm

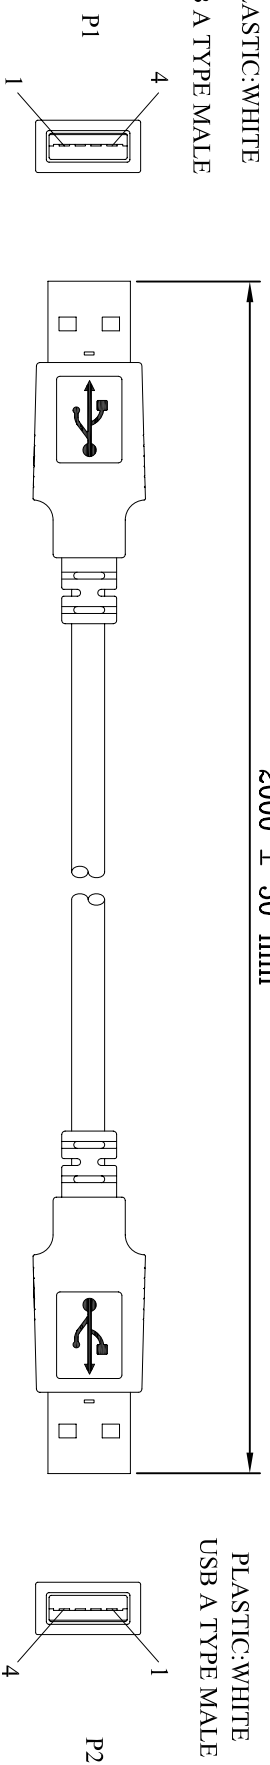

NOTE:

- 1.CABLE: UL-2725 28AWG(7/0.127)TC*1P INS:PE COLOR:WHITE, GREEN +2C*24AWG(7/0.203)TC INS:SR-PVC COLOR:RED,BLACK+AL/MYLAR +BRAID SHIELD (65%) PVC JACKET OD:4.7± 0.15mm COLOR:BEIGE
- 2.CONNECTOR: P1&P2:USB A TYPE MALE GOLD FLASH CONTACT, NICKELPLATED SHELL.
- 3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- 4.ELECTRICAL TEST:
 - <1>.100% OPEN SHORT & MIS WIRE TEST
 - <2>.CONTACT RESISTANCE 3 OHM MAX
 - <3>.INSULATION RESISTANCE 20M OHM MIN
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING

(HANKING SIZE MUST BE SMALLER THAN PACKING)

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 670
Title:	USB AM TO USB AM CABLE:GREY 2.0M

RoHS Compliant

EAN Code:
4016032064497

ST181407

1	2	3	4	5	6	7	A		
1	2	3	4	5	6	7	H		