


Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20.2005	01

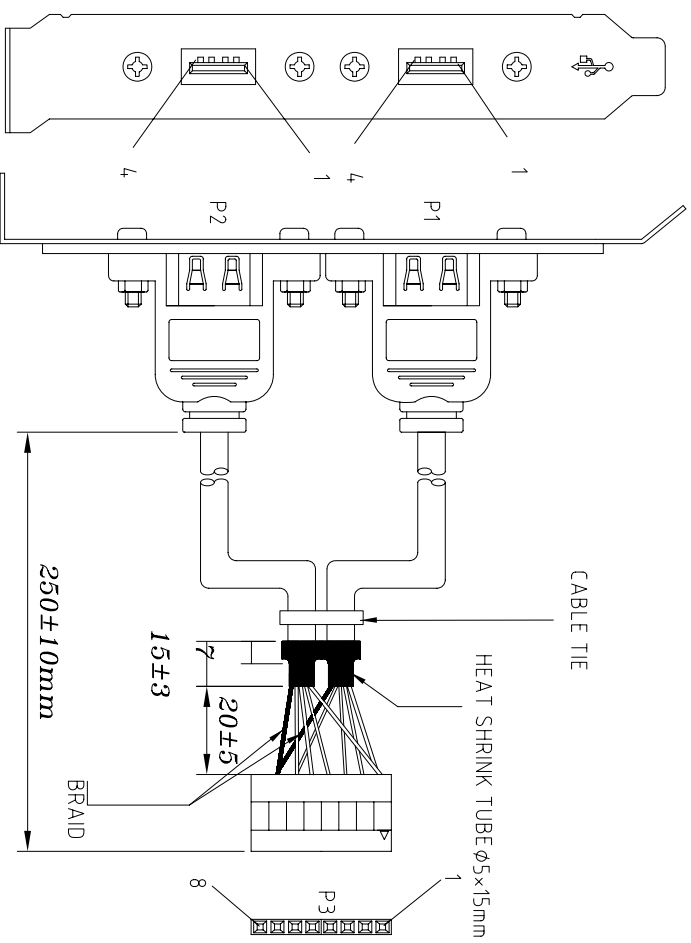

NOTE:

1. CABLE: UL-2725 28AWG×1PR+24AWG×2C+AL-FOLI
+28AWG DRAIN+BRAID(65%),PVC JACKET,
COLOR:BEIGE, OD=φ4.7±0.2mm.
- 2.CONNECTOR:
P1 & P2:USB A TYPE FEMALE , SOLDER TYPE
- 3.TERMINAL:JW/T#A2541T3B-1
- 4.HOUSING:JW/T#A2541H02-1x8P
- 5.HOOD:MOLDED PVC 45P , COLOR:BEIGE.
- 6.ELECTRICAL TEST: <1> 100% OPEN SHORT & MIS WIRE TEST
<2> CONTACT RESISTANCE 3 OHM MAX
<3> INSULATION RESISTANCE 20M OHM MIN
- 7.PACKING:SEE P-0039 REV.C PACKING DRAWING+EAN CODE
PACKING TYPE :DB VP4
(HANKING SIZE MUST BE SMALLER THAN PACKING)

P1	1 — RED	P3	1	P2	1
	2 — WHITE		2		2
	3 — GREEN		3		3
	4 — BLACK		6		6
			1		1
			4		2
			5		3
			6		4
SHELL	BRAID	7	BRAID		SHELL

- A
- B
- C
- D
- E
- F
- G
- H

RoHS Compliant

EAN Code:
4016032050865

STW407

Drawn by	Dec.20.2005	Norman Xu
Checked by	Dec.20.2005	Alex Dan
Approved by		

ASSMANN
Electronic GmbH

2 USB A/F TO 2.54MM 8PIN HSG , BEIGE

AK 674-8

Title:	Part No.
Scale	N/A
Unit	MM
Sheet	1/1

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	H