




Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01



IEEE1394 4M
PLASTIC:BLACK



3000±30mm



IEEE 1394 6M
PLASTIC:BLACK

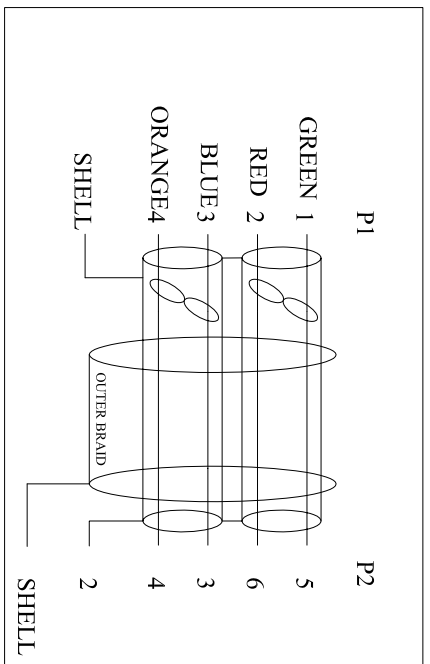

NOTE:

1. CABLE: [28AWG(7/0.127)T.C*1PAIR+AL/MYLAR+SPIRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(95%)+PVC JACKET COLOR:MATT BLACK.

2.CONNECTOR:
OD:6.0±0.15mm UL20276 IEEE 1394 CABLE

P1: IEEE1394 4PIN MALE GOLD PLATED 15μ" CONTACT
NICKEL PLATED SHELL.
P2: IEEE1394 6PIN MALE GOLD PLATED 15μ" CONTACT
NICKEL PLATED SHELL.

3.HOOD: P1: MOULDED TYPE,COLOR:MATT BLACK.
P2: MOULDED TYPE,COLOR:MATT BLACK.

4.TEST REQUESTED:

- <1>.100% OPEN SHORT MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3Ω MAX
- <3>.INSULATION RESISTANCE 20MΩ MIN
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
- PACKING TYPE: DB VP3
- (HANKING SIZE MUST BE SMALLER THAN PACKING)

RoHS Compliant

EAN Code:
4016032051756

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK-1394-304
Title:	1394 A 6PIN MALE TO 1394 A 4PIN MALE CABLE. 3.0M

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	H