

1

2

3


4

5

6

7

Signature	Revision History	Date	Rev.
Alex.Dan	For Bulk Production	Dec.20,2005	01

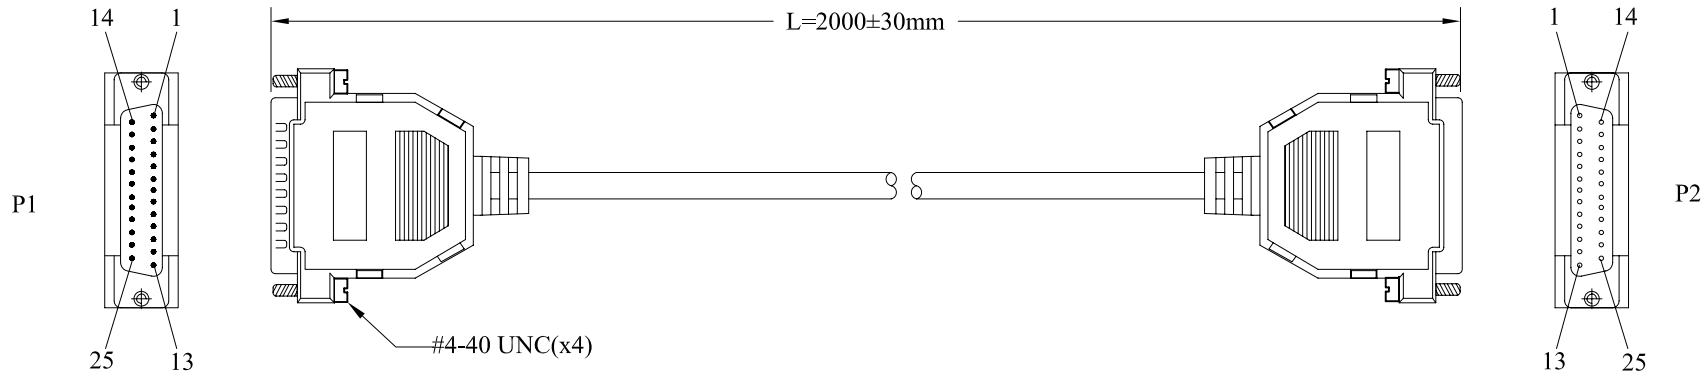

NOTES:

- 1.CABLE:NON-UL 28AWG(7/0.127)TC\*25C INS:PVC+DRAIN WIRE  
+AL-FOIL/MYLAR PVC JACKET OD:Ø7.0±0.2mm  
COLOR:BEIGE.
- 2.CONNECTOR:  
P1:DB25P MALE GOLD FLASH CONTACT,NICKEL PLATED SHELL .  
P2:DB25P FEMALE GOLD FLASH CONTACT,NICKEL PLATED SHELL .
- 3.HOOD:ASS'Y TYPE, COLOR:BEIGE.
- 4.ELECTRICAL TEST:  
100% OPEN SHORT MIS WIRE TEST  
CONTACT RESISTANCE 3 OHMS MAX .  
INSULATION RESISTANCE 20M OHMS MIN .
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING  
PACKING TYPE: DB VP4.  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

PIN OUT	
P1	1 2 3.....14 15 16 17 18 19 20 21 22 23 24 25 SHELL
P2	1 2 3.....14 15 16 17 18 19 20 21 22 23 24 25 SHELL

Date		Name		Part No.	
Dec.20,2005		Alex Dan		<b>AK 404 2M</b>	
Checked by		Norman Xu			
Approved by					
<b>ASSMANN</b> Electronic GmbH				Title.	
				EXTENSION CABLE DB25 M/F,2M	
				Scale	N/A
Unit		MM			

RoHS Compliant

EAN Code:  
4016032063704

ST81407

1

2

3

4

5

6

7