


| LTR | REV. | DESCRIPTION | DATE |
|-----|------|-------------|------|
| | | | |

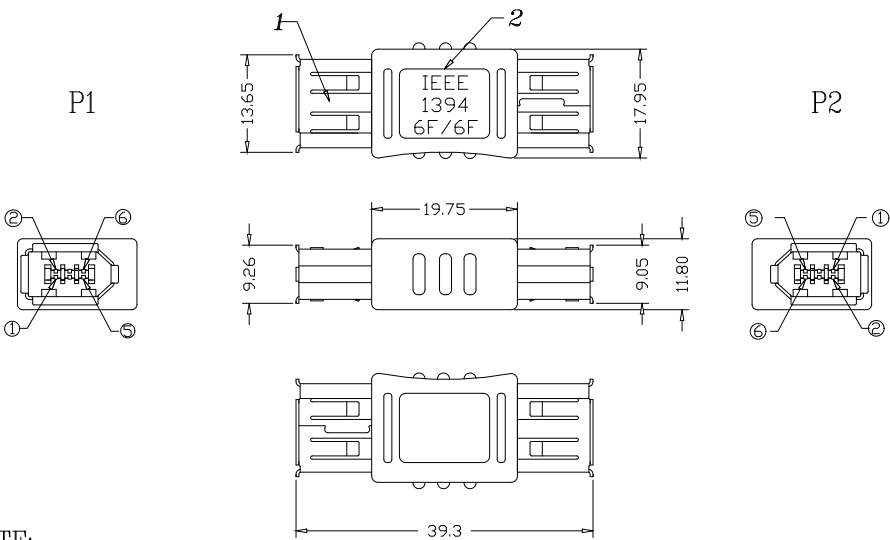

NOTE:

- 1.HOOK UP WIRE: UL1007 30AWG 7 STRAND L:17MM
- 2.CONNECTOR:
P1&P2: IEEE1394 USB FEMALE GOLD FALSH CONTACT;
NICKEL PLATED SHELL PLASTIC: WHITE
- 3.INNER MOLD WITH COPPER FOIL
- 4.HOOD: MOLDED TYPE PVC 45P COLOR: BLACK(NK-K01)
- 5.ELECTRICAL TEST:
 - <1> 100% OPEN SHORT & MIS WIRE TEST.
 - <2> CONTACT RESISTANCE 3 Ohms MAX.
 - <3> INSULATION RESISTANCE 20M Ohms MIN.
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING
- 7.EAN CODE: 4016032076179

PIN ASSIGNMENT

| | | | | | | | |
|-----------|---|---|---|---|---|---|-------|
| P1 FEMALE | 1 | 2 | 3 | 4 | 5 | 6 | SHELL |
| P2 FEMALE | 1 | 2 | 3 | 4 | 5 | 6 | SHELL |

| | | |
|--------------------|---|---------------------------|
| Tolerance Inch M/M | | |
| .X | .015 .30 | |
| .XX | .010 .10 | |
| .XXX | .005 .05 | Title |
| Draw | KIKI 04/19 | IEEE 1394 6P F/F MOLDED A |
| Check | App'd | Customer P/N: AB-1394-2 |
| Engr | Scale NONE Units m/m Third Angle Projection | Customer E-SSM |
| Dwg No. 160-0705 | | REV:A Sheet 1/1 |