



Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01


DIN 6/M
PLASTIC:BLACK



5000±50

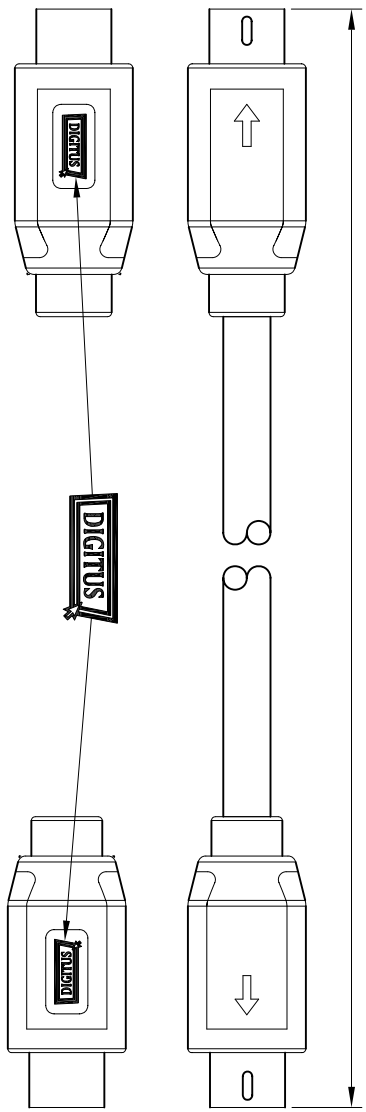

DIN 6/M
PLASTIC:BLACK



NOTE:
1.CABLE:NON-UL 28AWG(7/0.127)TC*6C INS:PVC+DRAIN WIRE
+AL-FOIL/MY PVC JACKET;COLOR:BLACK, OD:Ø5.0±0.2mm
2.CONNECTOR: P1&P2:MD6P MALE TINNED PLATED CONTACT, NICKEL PLATED SHELL.
3.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
4.ELECTRICAL TEST:100% OPEN SHORT MIS WIRE TEST.
CONTACT RESISTANCE 3 MAX.
INSULATION RESISTANCE 5M MIN.
5.PACKING:SEE P-0039 PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

P1	1	2	3	4	5	6	SHELL
P2	1	2	3	4	5	6	SHELL

DRAIN

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H

RoHS Compliant

S181407

Part No.	DK-103005		
Title	PS/2 Connection cable, MiniDin 6 pin 2 COLOR MOLD WITH DIGITUS LOGO		
Scale	N/A	Sheet	1/1
Unit	MM		

ASSMANN
Electronic GmbH

Drawn by	Dec:08,2007	Name	N. Xu
Checked by	Dec:08,2007		ALDan
Approved by	Dec:08,2007		T.Aulemann