


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec:08,2007	01

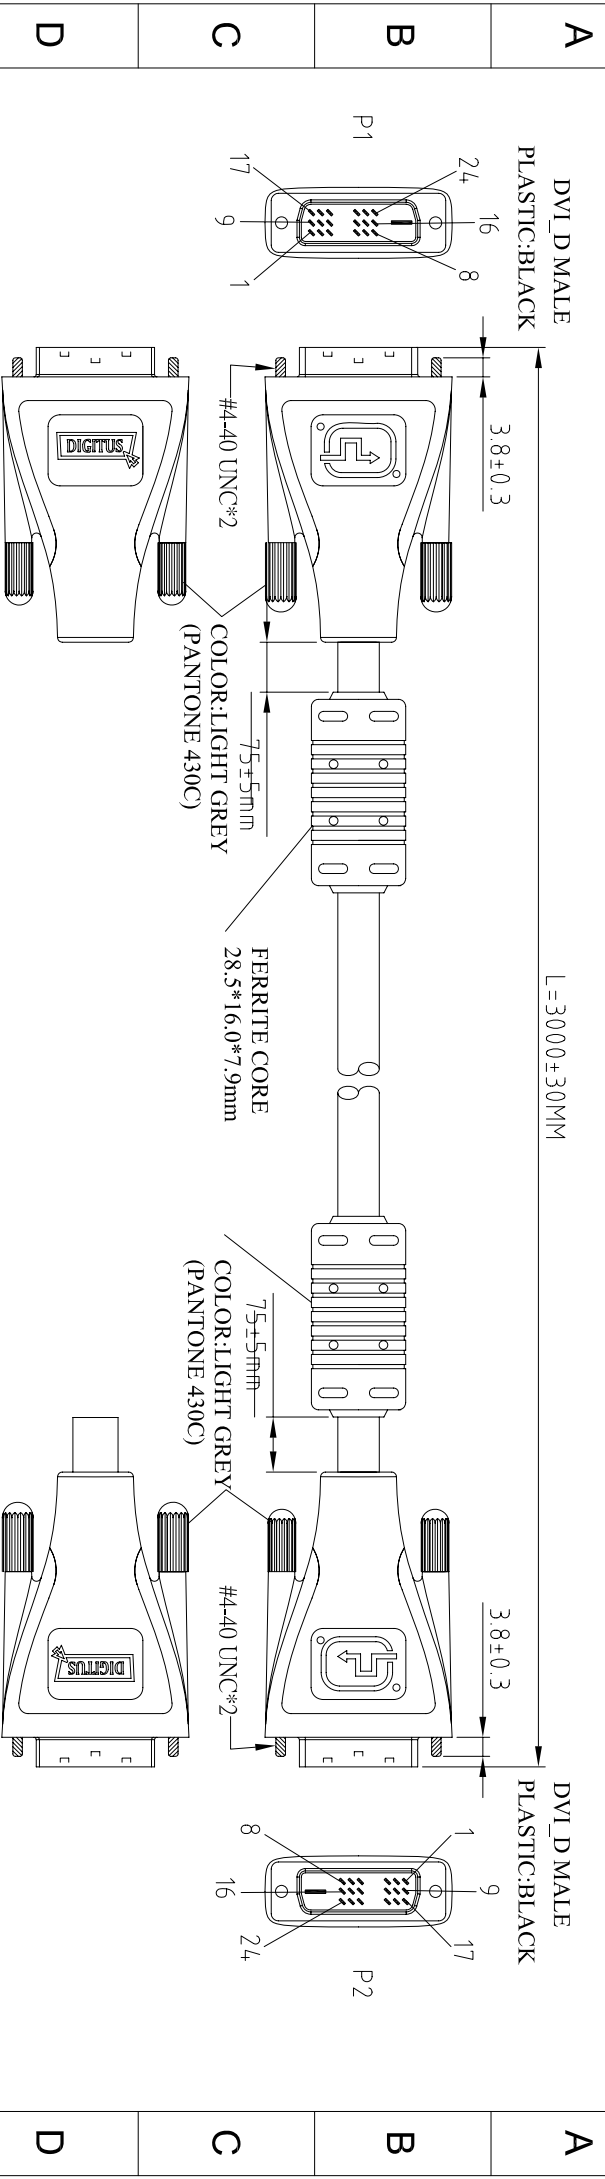

NOTE:

- 1.CABLE:UL20276{[28AWG(7/0.127)*1PAIR+DRAIN WIRE=MY+AL/MY]*4C+28AWG(7/0.127)*1PAIR+28AWG(7/0.127)*3C+AL/MYLAR+DRAIN WIRE(7/0.127)+85% BRAID};T.C PVC JACKET,OD:7.3±0.2mm COLOR:BLACK.

- 2.CONNECTOR:
P1&P2:DVI 19P: 18P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL
- 3.SHIELD: P1&P2 COPPER FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- 4.HOOD: FIRST MOLD:MOLEDDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLEDDED TYPE,PVC 45P COLOR:BLACK.
- 5.PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

A	DVI_D MALE PLASTIC:BLACK	2	3	4	5	6	7	A	
G	DK-110009	1	2	3	4	5	7	G	
F	Part No.	Title							F
E	Drawn by	DVI 18+1 MALE TO DVI 18+1 MALE CABLE							E
D	Checked by	2COLOR MOLD WITH DIGITUS LOGO							D
C	Approved by	Scale							C
B		Unit							B
A		Sheet							A

RoHS Compliant

ASSMANN
Electronic GmbH

STR1407

