


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01

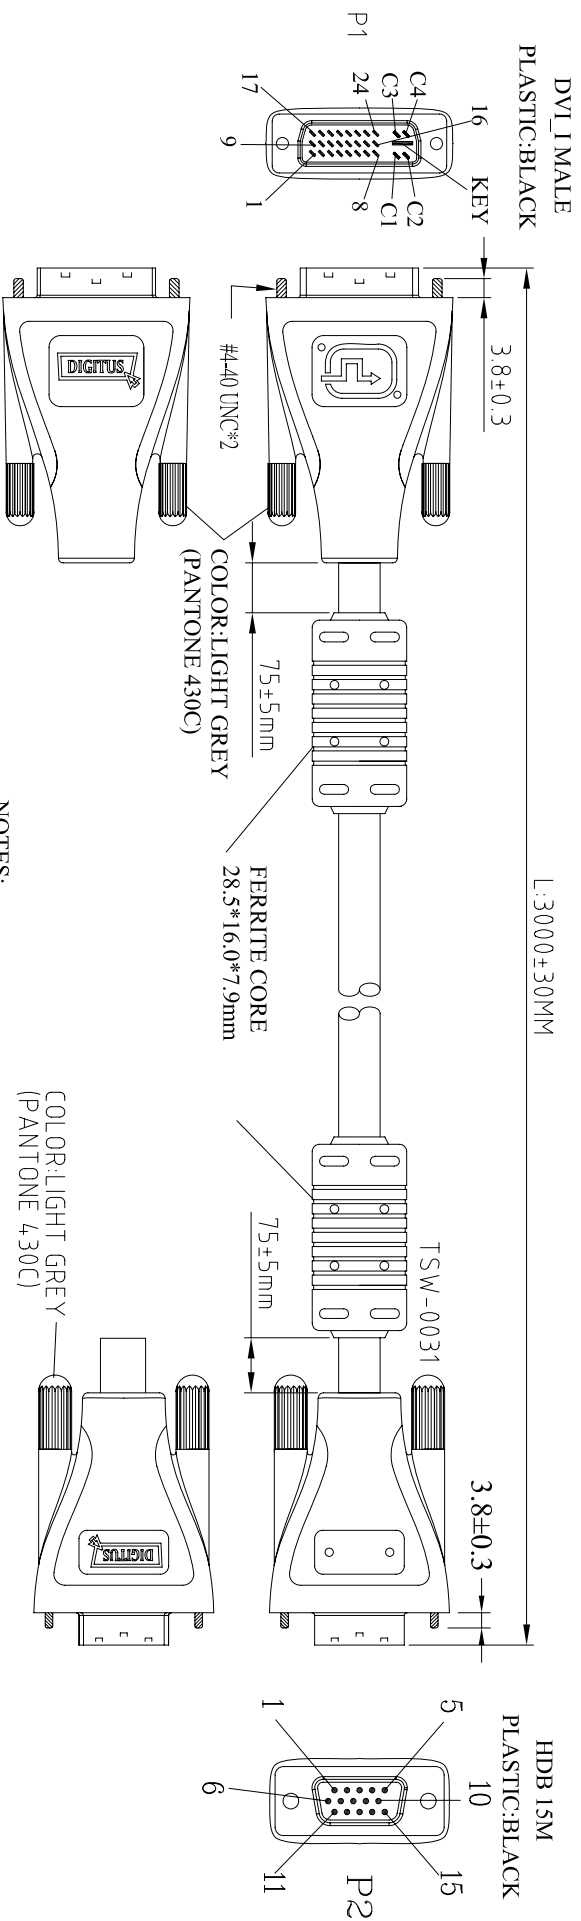

NOTES:

- CABLE: 30AWG(7/0.102)COAXIALX3C+28AWG(7/0.127)x5C+28AWG(7/0.127)*1PAIR+AL/MYLAR+DRAIN WIRE+BRAID SHIELD+JACKET:PVC OD:7.0±0.15mm COLOR:BLACK UL 20276 APPROVED.
- CONNECTOR:
 - P1: DVI 29P: 24P+4+KEY DIGITAL/ANALOG GOLD FLASH CONTACT NICKEL PLATED SHELL
 - P2: HDB 15P MALE GOLD FLASH CONTACT NICKEL PLATED SHELL
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD: FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
- PACKING: SEE P-0039 PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

WIRE CONNECTION

P1	WIRE COLOR	P2
6	_____	15
7	_____	12
8	_____	14
14,16	_____	9
15	_____	5,10
C1	_____	1
KEY	_____	6
C2	_____	2
KEY	_____	7
C3	_____	3
KEY	_____	8
C4	_____	13
SHELL:BRAID SHELL SHELL		

RoHS Compliant

Date	Name	Part No.
Dec.08.2007	N. Xu	DK-110035
Dec.08.2007	A.Dan	
Dec.08.2007	T.Aulemann	

ASSMANN
Electronic GmbH

Title: DVI 24+5 MALE TO VGA MALE CABLE
2COLOR MOLD WITH DIGITUS LOGO

Scale: N/A Unit: MM Sheet: 1/1

A	B	C	D	E	F	G	H
1	2	3	4	5	6	7	8