


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01

USB A TYPE MALE

5000±50

USB A TYPE MALE

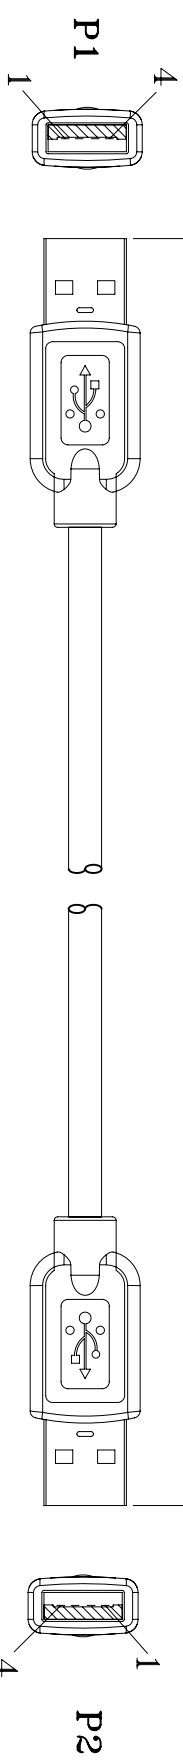

1 2 3 4 5 6 7

A

B

C

D

E

F


G

H

NOTE:

- 1.CABLE:UL-2725 28AWG(7/0.127)\*1PAIR INS:HD-PE+24AWG(7/0.203)\*2C  
INS:SR-PVC+AL-FOIL/MYLAR+DRAIN WIRE+BRAID(65%) PVC JACKET,  
OD:4.7±0.15mm COLOR:BLACK, REV 2.0.
- 2.CONNECTOR:  
P1&P2:USB A TYPE MALE GOLD PLATED 30u" CONTACT,  
NICKEL PLATED SHELL REV 2.0.
- 3.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P ,COLOR:LIGHT GREY(PANTONE 430C)  
SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.
- 4.ELECTRICAL TEST:  
<1>.100% OPEN SHORT & MIS WIRE TEST  
<2>.CONTACT RESISTANCE 3 OHM MAX  
<3>.INSULATION RESISTANCE 10M OHM MIN  
5.PACKING:SEE P-0039 PACKING DRAWING  
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

PIN OUT

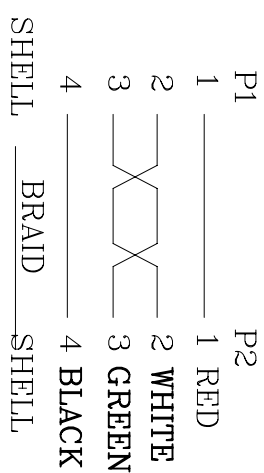

Date	Name
Dec.08.2007	N. Xu
Checked by	Aldan
Dec.08.2007	
Approved by	T.Aulemann
Dec.08.2007	

Part No.  
**DK-112020**

Title	
USB AM TO AM CABLE REV2.0 2 COLOR MOLD WITH DIGITUS LOGO	
Scale	N/A
Unit	MM

**ASSMANN**  
Electronic GmbH

RoHS Compliant

1 2 3 4 5 6 7

H

G

F

E

D

C

B

A

STR1407

Sheet 1/1