Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08,2007	01

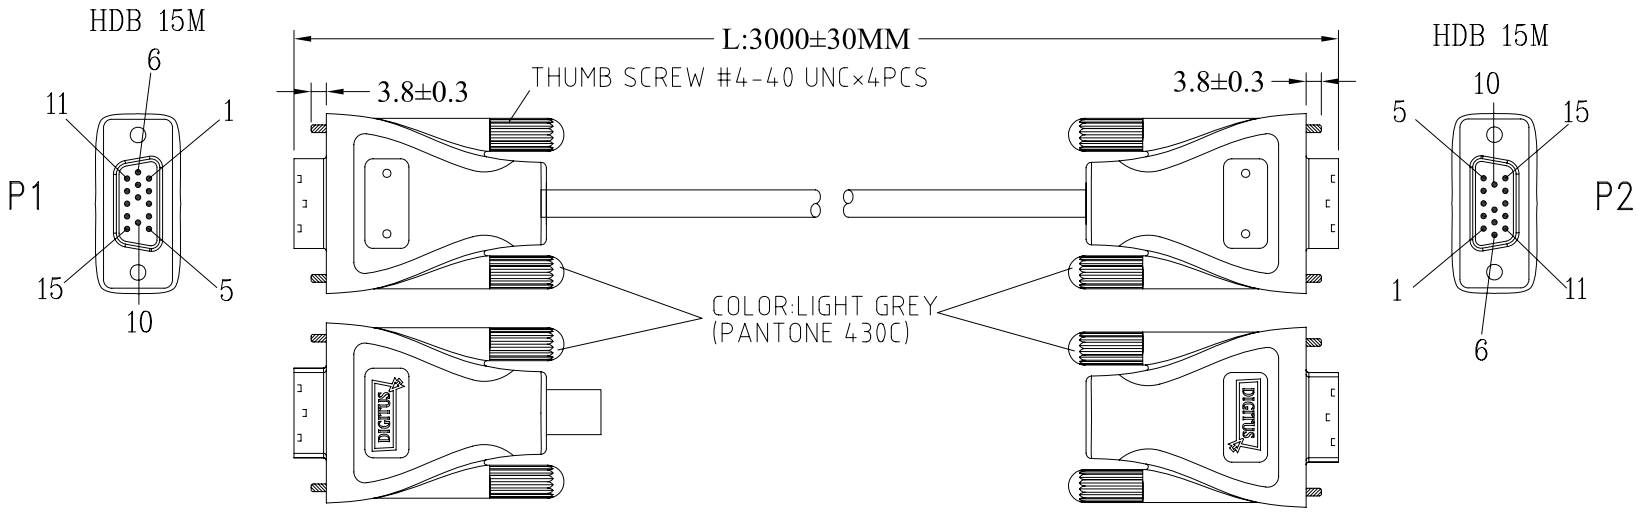

NOTE:

1.CABLE: NON-UL 28AWG(7/0.127)TC*14C INS:PVC+
DRAIN WIRE(26AWG 7/0.16)+AL-FOIL/MYLAR
PVC JACKET COLOR: BLACK OD:6.0±0.2mm

2.CONNECTOR:
P1&P2:HD15P MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL(THE 9TH PIN UNLOAD)

3.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.

4.ELECTRICAL TEST:
<1>100% OPEN SHORT & MIS WIRE TEST.
<2>CONTACT RESISTANCE 3 Ohms MAX.
<3>INSULATION RESISTANCE 5M Ohms MIN.

5.PACKING:SEE P-0039 PACKING DRAWING+EAN CODE

PIN OUT

P1	1	2	3	4	5	6	7	8	10	11	12	13	14	15	SHELL
															DRAIN
P2	1	2	3	4	5	6	7	8	10	11	12	13	14	15	SHELL

RoHS Compliant

	Date	Name
Drawn by	Dec.08,2007	N. Xu
Checked by	Dec.08,2007	A.Dan
Approved by	Dec.08,2007	T.Aufermann

ASSMANN
Electronic GmbH

ST81407

Part No.
DK-113030

Title
VGA TO VGA CONNECTION CABLE
2COLOR MOLD WITH DIGITUS LOGO

Scale	N/A	Sheet
Unit	MM	1/1