



Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01

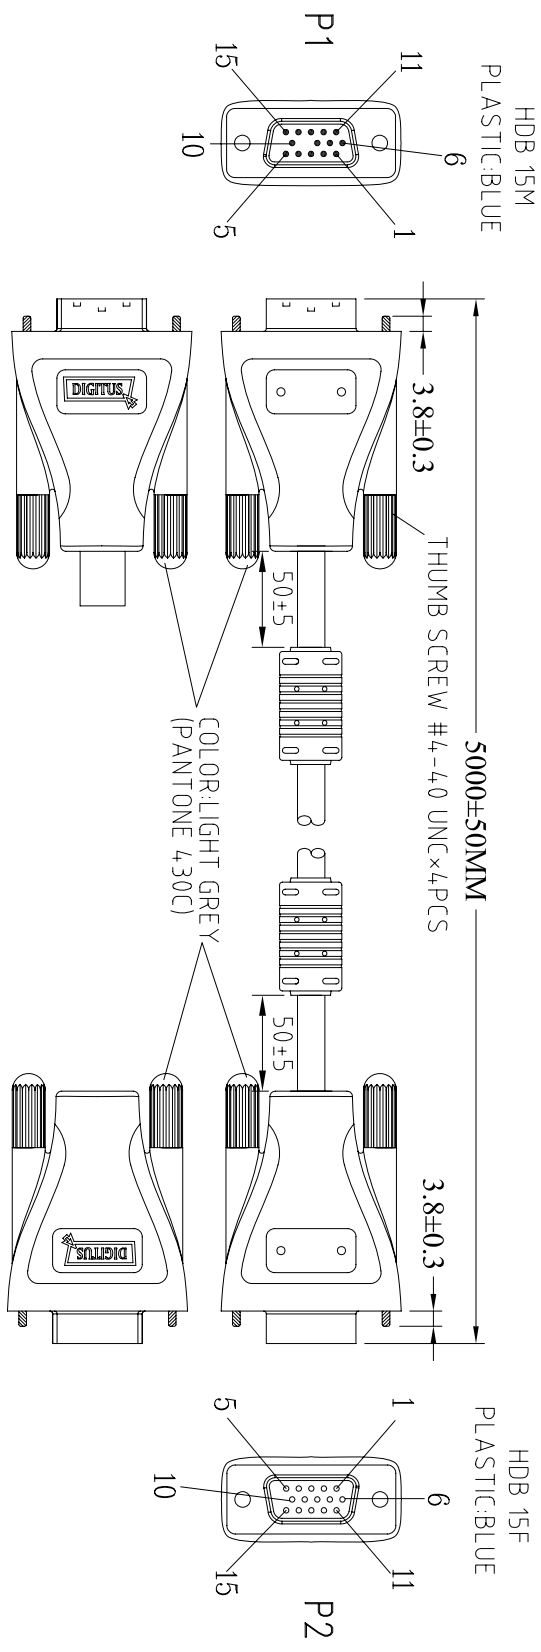

- NOTE:
- CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL INNER JACKET:PVC OD: 2.5±0.1mm(UL-1354)+28AWG(7/0.127 T.C)
*7C+INSULATION:SR-PVC IDØ 0.9±0.05mm(UL-1061)+AL/MYLAR+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BLACK, OD: 8.5±0.15mm UL-2919 APPROVED.
 - CONNECTOR:
P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL (THE 9TH PIN UNLOAD)
P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - FERRITE CORE:17.5*28.5*9.5mm
 - SHIELD:COPPER-FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE BRAID
 - HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P.COLOR:LIGHT GREY(PANTONE 430C) SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK..
 - ELECTRICAL TEST<1>>.100% OPEN SHORT & MIS WIRE TEST <2>.CONTACT RESISTANCE 3 Ohms MAX
 - PACKING:SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

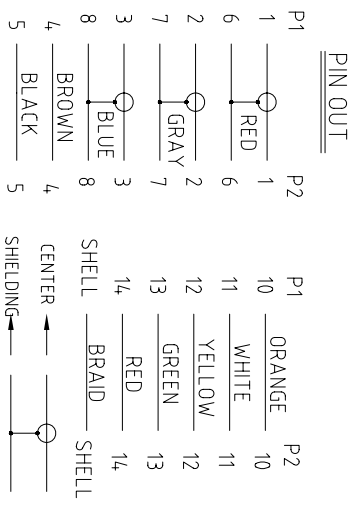

- 1
- 2
- 3
- 4
- 5
- 6
- 7

Drawn by	Dec:08,2007	N. Xu
Checked by	Dec:08,2007	ADan
Approved by	Dec:08,2007	T.Aulemann

Part No. **DK-113051**

Title
MORNIOR EXTENTION CABLE VGA MALE TO FEMALE
2 COLOR MOLD WITH DIGITUS LOGO

RoHS Compliant

H	1	2	3	4	5	6	7	H
G	<p>Scale Unit: N/A MM</p> <p>Sheet: 1/1</p>							