







Signature	Revision History	Date	Rev.
	For Bulk Production	Dec.08.2007	01


IEBEE 1394 4M
PLASTIC:BLACK

5000±50

IEBEE 1394 6M
PLASTIC:BLACK



- NOTE:
- CABLE:JUL20276 [28AWG(7/0.127)T.C*1PAIR+AL/MYLAR+SPRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(95%)+PVC JACKET; COLOR:MATT BLACK, OD:Ø6.0±0.15mm
 - CONNECTOR:
 - P1: IEBEE1394 4PIN MALE GOLD PLATED 15 μ" CONTACT NICKEL PLATED SHELL.
 - P2: IEBEE1394 6PIN MALE GOLD PLATED 15 μ" CONTACT NICKEL PLATED SHELL.
 - HOOD:FIRST MOLD:MOULDED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)
SECOND MOLD:MOULDED TYPE,PVC 45P COLOR:BLACK.
 - TEST REQUEST:
 - <1>:100% OPEN SHORT MIS WIRE TEST
 - <2>:CONTACT RESISTANCE 3 Ω MAX
 - <3>:INSULATION RESISTANCE 10M Ω MIN
 - PACKING:SEE P-0039 PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

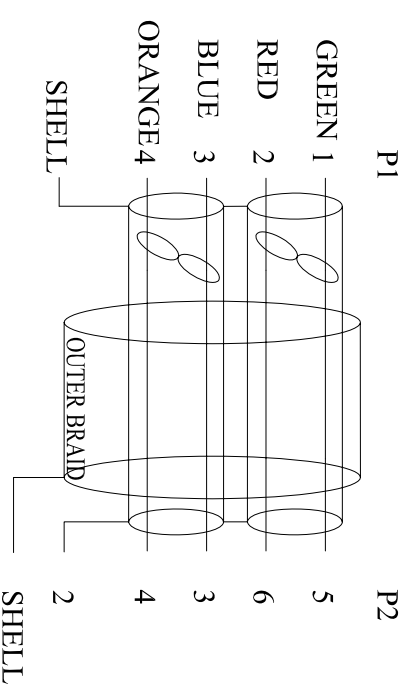

RoHS Compliant

Date	Name
Dec.08.2007	N. Xu
Checked by	A.Dan
Dec.08.2007	
Approved by	T.Aulemann
Dec.08.2007	

Part No.	DK-115008
Title	FireWire Cable,Connect,6pin-4pin 2 COLOR MOLD WITH DIGITUS LOGO
Scale	N/A
Unit	MM
Sheet	1/1

STR1407

ASSMANN
Electronic GmbH

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H