


Signature	Revision History	Date	Rev.
	For Bulk Production	Dec:08,2007	01


1500±30

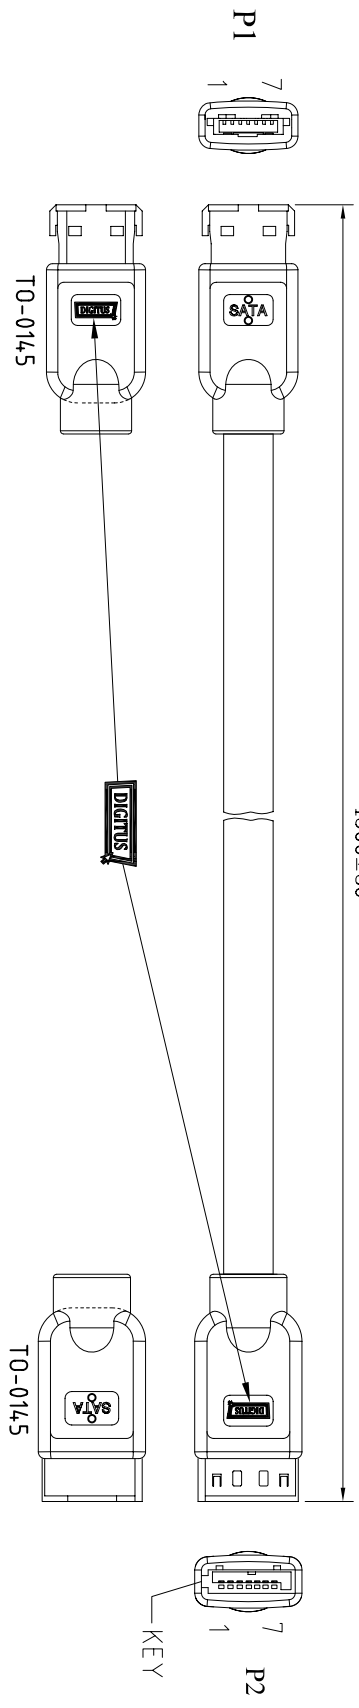

NOTES:

1. CABLE: UL2725 [26AWG(1/0.404)*2F INS:HD-PE ID:1.3*2.7+DRAIN WIRE 28AWG(1/0.32)*2C+AL/MY]*2C INNER JACKET:PVC OD:7.3*2.1mm +AL/MY+BRAID(1/6/10/0.1)PVC JACKET, COLOR: BLACK, OD:9.0*4.0mm, IMPEDANCE: 100 OHM.
2. CONNECTOR:P1:SATA II 7P RIVETING TYPE CRIMP TYPE PBT BLACK G/F W/METAL SHELL P2:SATA I 7P CRIMP TYPE PLASTIC BLACK G/F W/METAL SHELL.
3. SHIELD: COPPER-FOIL
4. HOOD: FIRST MOLD: MOLDED TYPE, PVC 30P, COLOR: LIGHT GREY (PANTONE 430C) SECOND MOLD: MOLDED TYPE, PVC 45P COLOR: BLACK.
5. TEST REQUEST:
 1. 100% OPEN SHORT & MIS WIRE TEST
 2. CONTACT RESISTANCE: 3 ohm MAX
 3. INSULATION RESISTANCE: 10M ohm MIN
 4. HI-POT DC 300V/0.01SEC
6. PACKING: SEE P-0039 PACKING DRAWING. (BINDING SIZE MUST BE SMALLER THAN BLISTER)

PIN ASSIGNMENT

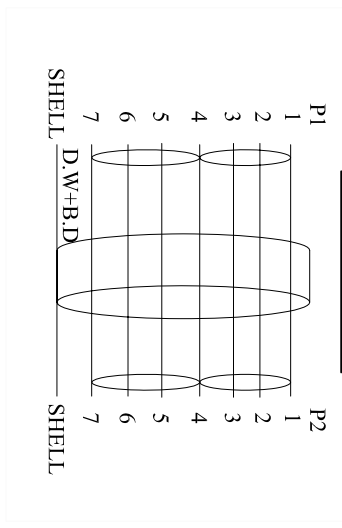

A B C D E F G H

1	2	3	4	5	6	7
---	---	---	---	---	---	---

<p>Part No. DK-126005</p>		<p>Title</p> <p>SATA Cable connect eSata L-Type-Sata L-Type. 2 COLOR MOLD WITH DIGITUS LOGO</p>	
<p>Drawn by</p> <p>Dec:08,2007</p> <p>N. Xu</p>	<p>Date</p> <p>Dec:08,2007</p> <p>N. Xu</p>	<p>Checked by</p> <p>Dec:08,2007</p> <p>A.Dan</p>	<p>Approved by</p> <p>Dec:08,2007</p> <p>T.Aulemann</p>
<p>Scale</p> <p>N/A</p>		<p>Sheet</p> <p>1/1</p>	
<p>Unit</p> <p>MM</p>		<p>Scale</p> <p>N/A</p>	

RoHS Compliant

STR1407

A B C D E F G H