


Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec.20,2005	01

HDB 15M
PLASTIC:BLUE

10000 ± 100mm

THUMB SCREW:#4-40*4


HDB 15F
PLASTIC: BLUE

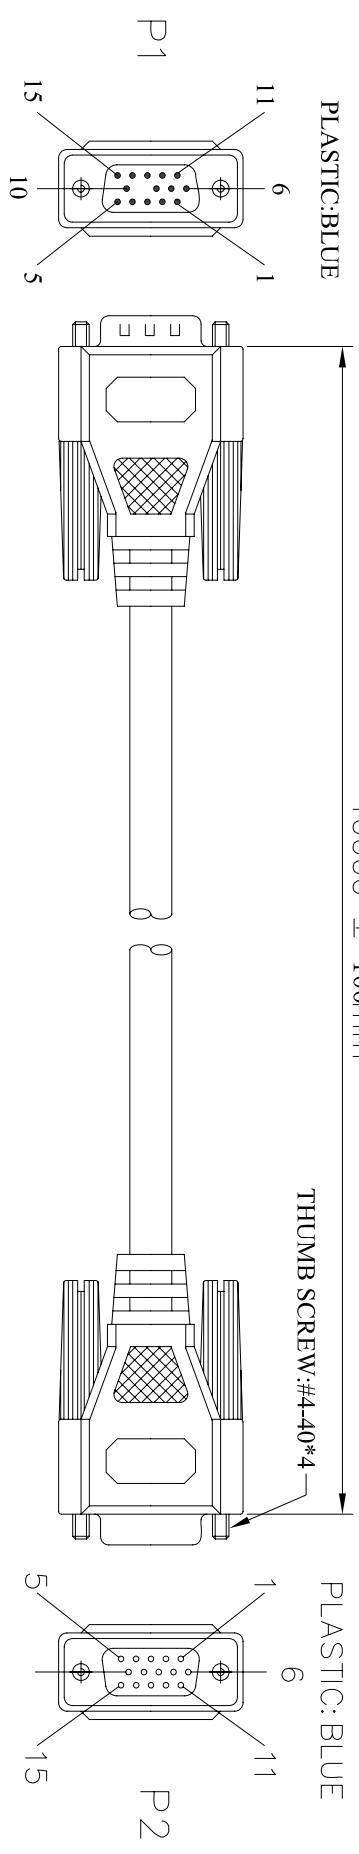

NOTES:

- CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPRAL INNER JACKET:PVC OD: 2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)
*7C+INSULATION:SR-PVC ID: 0.9± 0.05mm(UL-1061)+AL/MYLAR+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BEIGE, OD: 8.5± 0.15mm UL-2919 APPROVED
- CONNECTOR:
P1:HDB 15P MALE.THE 9TH PIN IS EMPTY, GOLD FLASH CONTACT, NICKEL PLATED SHELL
P2:HDB 15P FEMALE.GOLD FLASH CONTACT,NICKEL PLATED SHELL
4.SHIELD:P1 & P2 COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
5.HOOD:MOULDED TYPE,PVC 45P,COLOR:BEIGE.
6.ELECTRICAL TEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3 OHMS MAX
- <3>.INSULATION RESISTANCE 20M OHMS MIN
- 7.PACKING:SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN BLISTER)

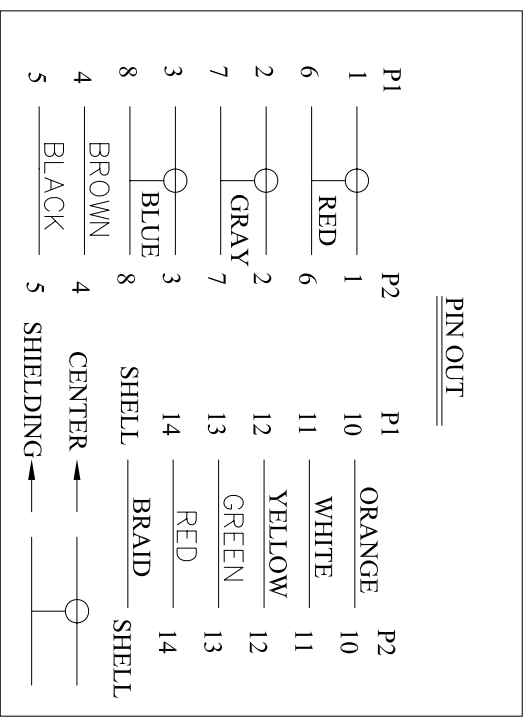

RoHS Compliant

EAN code:
4016032063568

Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.	AK 3750X
Title:	PREMIUM XGA MONITOR Connection Cable
Scale	N/A
Unit	MM
Sheet	1/1

ASSMANN
Electronic GmbH

STR1407

1	2	3	4	5	6	7
H	G	F	E	D	C	B