

1

2

3

4

5



6

7

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01


IEEE1394 4M
PLASTIC:BLACK

P1

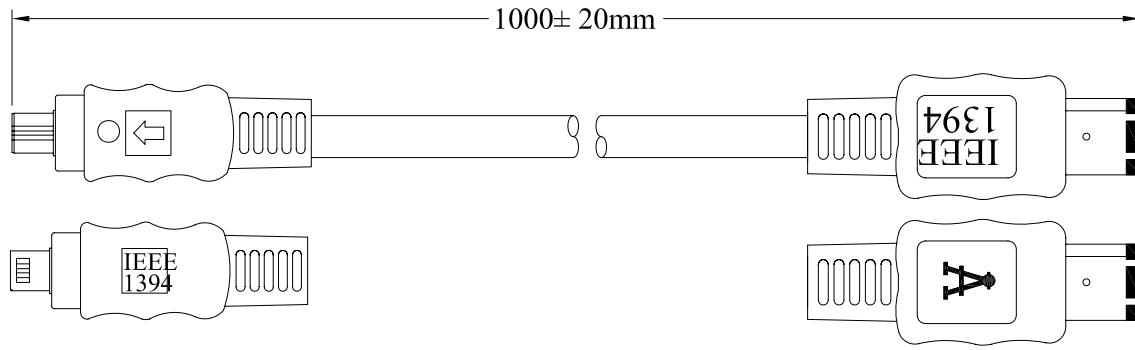


IEEE 1394 6M
PLASTIC:BLACK

P2



NOTE:

- CABLE: [28AWG(7/0.127)T.C*1PAIR+AL/MYLAR+SPIRAL(66/0.08)]*2+FILLER+MYLAR*2+BRAID(95%)+PVC JACKET COLOR:MATT BLACK.
OD:6.0±0.15mm UL20276 IEEE 1394 CABLE
- CONNECTOR:
P1: IEEE1394 4PIN MALE GOLD PLATED 15μ'' CONTACT NICKEL PLATED SHELL.
P2: IEEE1394 6PIN MALE GOLD PLATED 15 μ'' CONTACT NICKEL PLATED SHELL.
- HOOD: P1: MOLDED TYPE,COLOR:MATT BLACK.
P2: MOLDED TYPE,COLOR:MATT BLACK.
- TEST REQUEST:
<1>.100% OPEN SHORT MIS WIRE TEST
<2>.CONTACT RESISTANCE 3Ω MAX
<3>.INSULATION RESISTANCE 20MΩ MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE: DB VP2
(HANKING SIZE MUST BE SMALLER THAN PACKING)

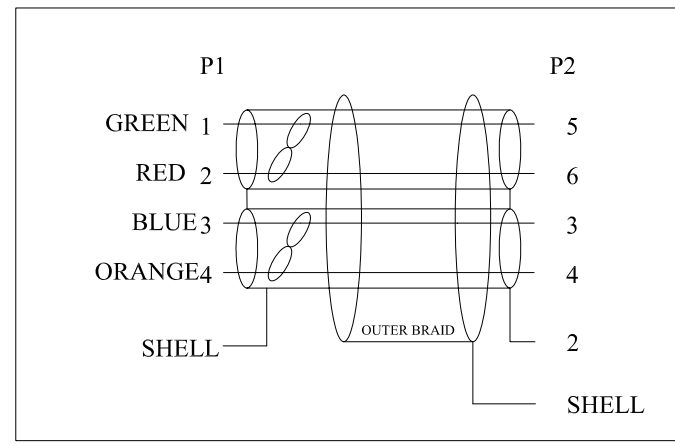

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

RoHS Compliant

EAN Code:
4016032078081

ST81407

	Date	Name	Part No. AK-1394-104
Drawn by	Dec.20,2005	Norman Xu	
Checked by	Dec.20,2005	Alex Dan	
Approved by			Title: 1394 A 6PIN MALE TO 1394 A 4PIN MALE CABLE, 1.0M
ASSMANN Electronic GmbH			
			Scale
Unit	MM		1/1

1

2

3

4

5

6

7