

1

2

3

4

5


6

7

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk production	Dec.20.2005	01

NOTES:

- 1.HOOK UP WIRE: UL1061 28AWG
- 2.CONNECTOR:
P1&P2: IEEE1394 4P TYPE FEMALE GOLD FALSH CONTACT;
NICKEL PLATED SHELL PLASTIC: BLACK
- 3.CORE: A14RID 4*3.2*7.0 mm
- 4.HOOD: MOLDED TYPE PVC 45P COLOR:BLACK.
- 5.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MIS WIRE TEST.
<2> CONTACT RESISTANCE 3 OHMS MAX.
<3> INSULATION RESISTANCE 20M OHMS MIN.
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING
- 7.EAN CODE:4016032118039

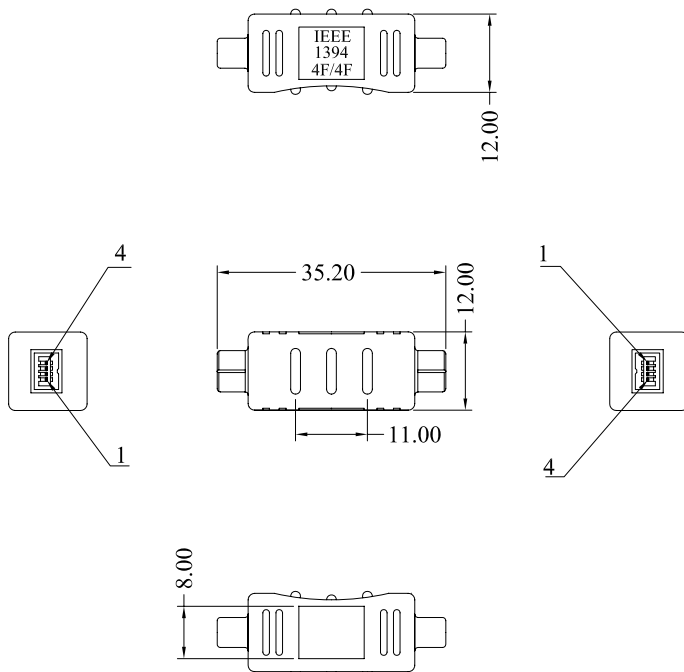

PIN ASSIGNMENT

1394 4P FEMALE	1	2	3	4	SHELL
			○	○	
1394 4P FEMALE	3	4	1	2	SHELL

RoHS Compliant

EAN Code:
4016032118039

ST81407

	Date	Name	Part No.	
Drawn by	Dec.20,2005	Norman Xu	AB-1394-5	
Checked by	Dec.20,2005	Alex Dan		
Approved by				
Title.			IEEE 1394 ADAPTOR 4/F-4/F	
Scale		N/A	Sheet	
Unit		MM	1/1	

ASSMANN
Electronic GmbH

1

2

3

4

5

6

7