

1

2

3


4

5

6

7

Signature	Revision History	Date	Rev.
Norman Xu	For Bulk Production	Dec.20,2005	01

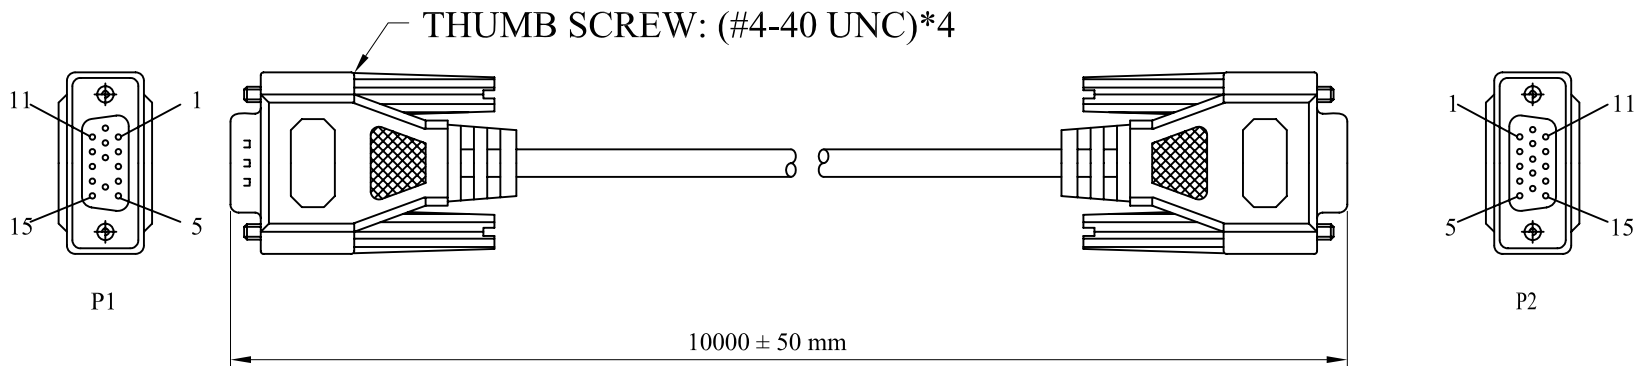

NOTE:

- CABLE: NON-UL 28AWG(7/0.127)TC*14C INS:PVC+DRAIN WIRE(26AWG 7/0.16)+AL-FOIL/MYLAR
PVC JACKET COLOR:BEIGE, OD:6.0±0.2mm,(GLL)
- CONNECTOR:
P1:HD15P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL(THE 9TH PIN UNLOAD)
P2:HD15P FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
- HOOD:MOLDED TYPE PVC 45P COLOR:BEIGE.
- ELECTRICAL TEST:
<1>100% OPEN SHORT & MIS WIRE TEST.
<2>CONTACT RESISTANCE 3 Ohms MAX.
<3>INSULATION RESISTANCE 20M Ohms MIN.
- PACKING:SEE P-0039 REV.C PACKING DRAWING+EAN CODE

PACKING TYPE: DB VP5
(HANKING SIZE MUST BE SMALLER THAN PACKING)

PIN OUT	
P1	1 2 3 4 5 6 7 8 10 11 12 13 14 15 SHELL
P2	1 2 3 4 5 6 7 8 10 11 12 13 14 15 SHELL

RoHS Compliant

EAN CODE:
4016032063544

ST81407

Drawn by	Date	Name	Part No. AK 375		
Dec.20,2005	Norman Xu				
Checked by	Date	Name			
Dec.20,2005	Alex Dan		Title VGA Monitor Extension Cable		
Approved by					
ASSMANN Electronic GmbH			Scale	N/A	Sheet 1/1
			Unit	MM	

1

2

3

4

5

6

7