


Signature	Date	Revision History	Date	Rev.
Norman Xu	Dec.20.2005	For Bulk Production	Dec.20.2005	01

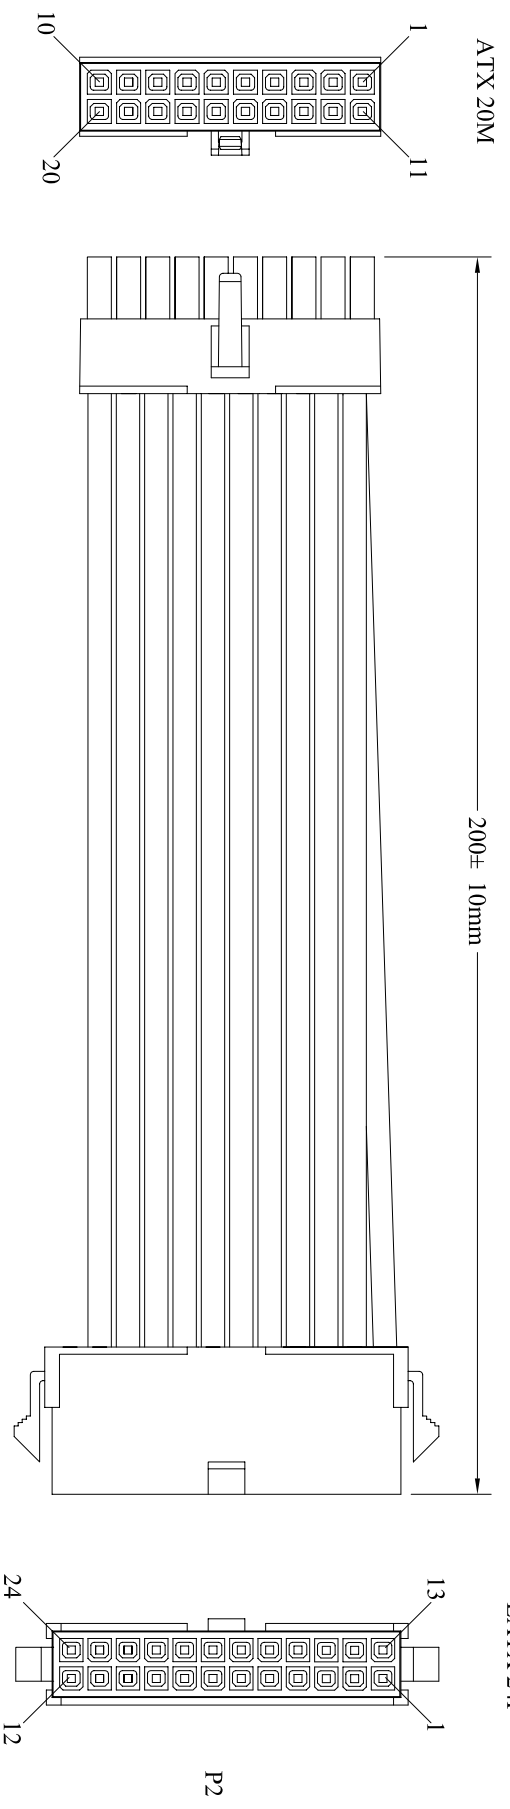

P1	1	ORANGE	1	20
	2	ORANGE	2	
	3	BLACK	3	
	4	RED	4	
	5	BLACK	5	
	6	RED	6	
	7	BLACK	7	
	8	GRAY	8	
	9	PURPLE	9	
	10	YELLOW	10	
	11	ORANGE	11	
	12	BLUE	12	
	13	BLACK	13	
	14	GREEN	14	
	15	BLACK	15	
	16	BLACK	16	
	17	BLACK	17	
	18	BLACK	18	
	19	WHITE	19	
	20	RED	20	
P2	1	ORANGE	1	22

- NOTES:
- 1.HOOK UP WIRE:UL-1007 18AWG
  - 2.CONNECTOR:
    - P1:ATX MALE 2\*10POS 4.2mm PITCH H.S.G. NYLON 66 UL94V-2, TYU P/N:TY4281HNO-2\*10 TERMINAL TYU P/N:TY4281TBH-A BRASS/TIN-PLATED FOR 18~24AWG
    - P2:EATX FEMALE 2\*12POS 4.2mm PITCH H.S.G. NYLON 66 UL94V-2, TYU P/N:TY4282HNO-2\*12 TERMINAL TYU P/N:TY4282TBH-A BRASS/TIN-PLATED FOR 18~24AWG
  - 3.ELECTRONIC TEST:<1>. 100% OPEN SHORT & MIS WIRE TEST
    - <2>. CONTACT RESISTANCE 3 OHMS MAX
    - <3>. INSULATION RESISTANCE 20M OHMS MIN
  - 4.PACKING:SEE P-0039 REV. C PACKING DRAWING  
(HANKING SIZE MUST BE SMALLER THAN PACKING)  
PACKING TYPE: DB-VP2.

Drawn by	Dec.20.2005	Norman Xu
Checked by	Dec.20.2005	Alex Dan
Approved by		

Part No.	AK ATX-ADAP2
Title.	24F / 20M POWER CABLE

RoHS Compliant

EAN Code:  
4016032183761

STR 407

1	2	3	4	5	6	7
H	G	F	E	D	C	B
Scale		Unit		Sheet		
N/A		MM		1/1		