
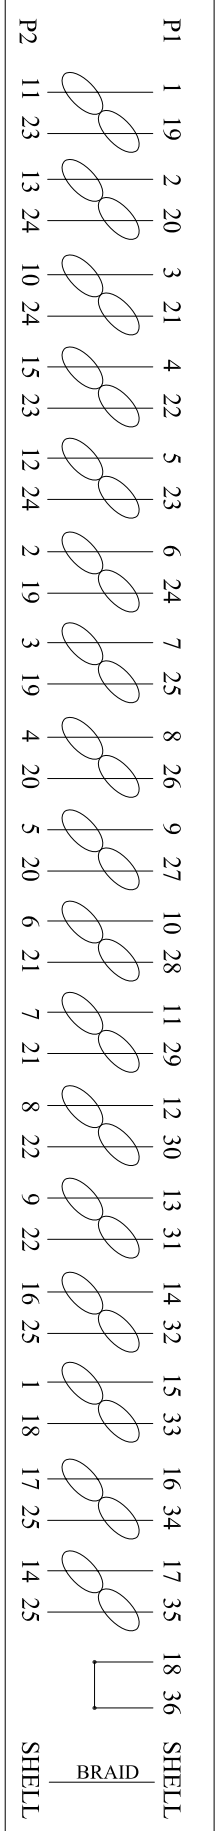


Signature	Date	Rev.
Alan Dan	Dec.20.2005	01
Revision History		
For Bulk Production		

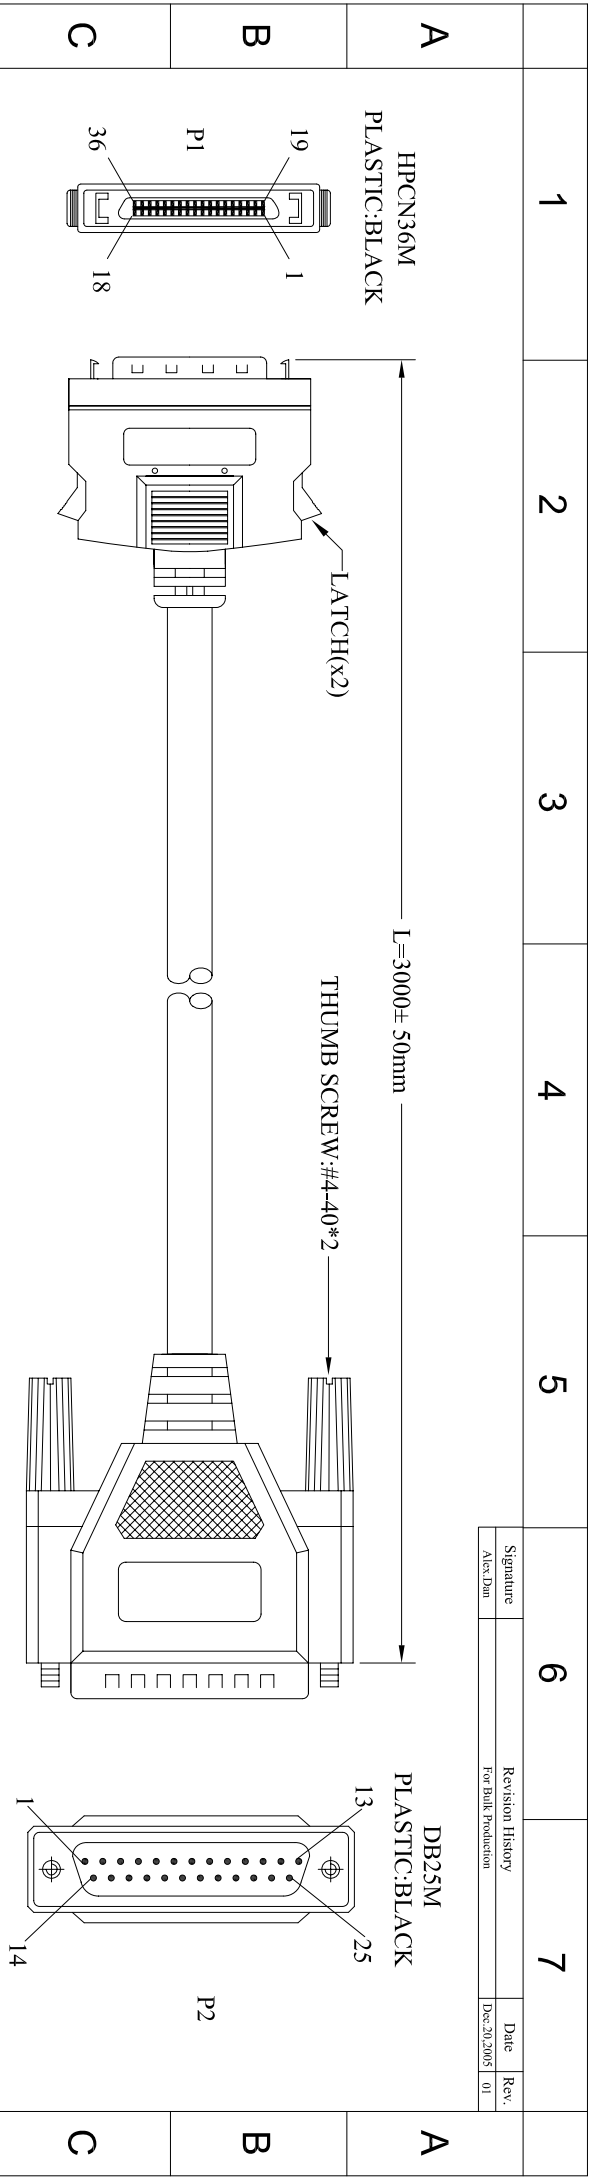

**NOTES:**

- 1.CABLE:UL-20276 28AWG(7/0.127 T.C)\*18TP+INS:PP+AL/MYLAR+DRAIN WIRE +BRAID(85%) JACKET:PVC OD:Ø7.5± 0.15mm COLOR:BEIGE.
- 2.CONNECTOR:  
P1:HPCN36P MALE GOLD FLASH CONTACT,NICKEL PLATED SHELL.  
P2:DB25P MALE GOLD FLASH CONTACT,NICKEL PLATED SHELL.
- 3.HOOD:P1&P2:MOLDED TYPE COLOR:BEIGE.
- 4.SHIELD:COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
- 5.ELECTRICAL TEST:100% OPEN SHORT MIS WIRE TEST.  
CONTACT RESISTANCE 3 OHMS MAX.  
INSULATION RESISTANCE 20M OHMS MIN.
- 6.PACKAGING:SEE P-0039 REV.C PACKING DRAWING.  
PACKING TYPE: DB VP4.  
(HANKING SIZE MUST BE SMALLER THAN PACKING).

1	2	3	4	5	6	7
<div style="border: 1px solid green; padding: 5px; display: inline-block;"> <b>Rohs Compliant</b> </div>		EAN Code: 4016032064589		STR1407		
<div style="font-size: 2em; font-weight: bold;">ASSMANN</div> Electronic GmbH				Part No. <div style="font-size: 1.5em; font-weight: bold;">AK 707 3M</div>		
Title: HP CN36M/DB25M CABLE,3M		Scale N/A		Sheet 1/1		
Drawn by Dec.20.2005 Alex Dan		Date Dec.20.2005		Name Alex Dan		
Checked by Dec.20.2005 Norman Xu		Approved by		Title: HP CN36M/DB25M CABLE,3M		
Approved by		Date Dec.20.2005		Name Norman Xu		