
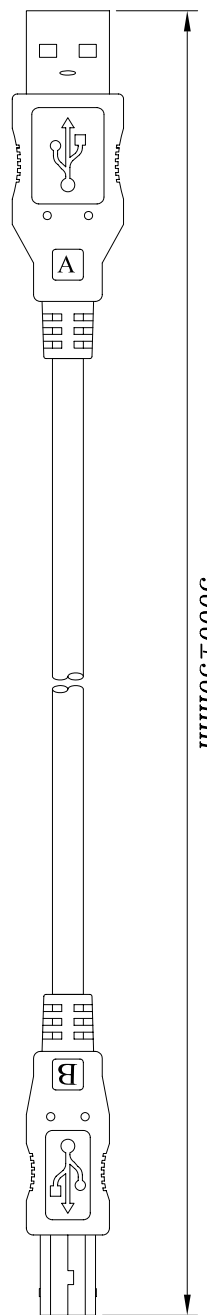


Signature	Date	Rev.
Norman Xu	Dec.20,2005	01



Revision History	Date	Rev.
For Bulk Production	Dec.20,2005	01

A USB A TYPE MALE
PLASTIC:WHITE

5000±50mm



B USB B TYPE MALE
PLASTIC:WHITE

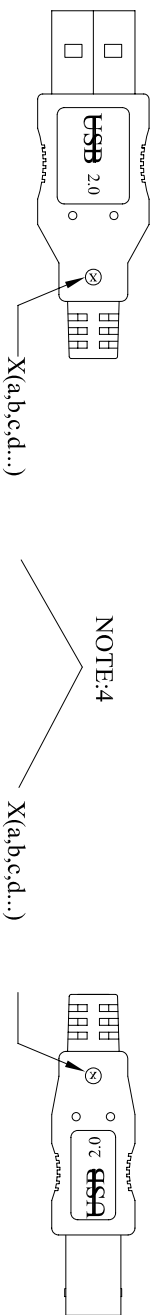

NOTE:4

NOTES:

- 1.CABLE:UL-2725 [28AWG(7/0.127)*1PR+24AWG(7/0.203)*2C +AL-FOIL/MYLAR+DRAIN WIRE(7/0.127)+65% BRAID]TIN PVC JACKET OD:4.7± 0.15mm COLOR:BEIGE, REV 2.0
- 2.CONNECTER:
 - P1: USB A TYPE MALE GOLD PLATED 30u" CONTACT, NICKEL PLATED SHELL REV 2.0.
 - P2:USB B TYPE MALE GOLD PLATED 30u" CONTACT, NICKEL PLATED SHELL REV 2.0.
- 3.HOOD: MOLDED TYPE, PVC 45P, COLOR:BEIGE.
- 4.TOOLING CAVITY INDICATION FOR INSPECTION
- 5.ELECTRICAL TEST:
 - <1>100% OPEN SHORT & MIS WIRE TEST.
 - <2>CONTACT RESISTANCE 3 Ohms MAX.
 - <3>INSULATION RESISTANCE 20M Ohms MIN.
- 6.PACKING:SEE P-0039 REV.C PACKING DRAWING

P1	P2
RED 1	1 VCC
WHITE 2	2 -DATA
GREEN 3	3 +DATA
BLACK 4	4 GROUND
SHELL	BRAID
	SHELL

G PACKING TYPE: DB VP4
(HANKING SIZE MUST BE SMALLER THAN PACKING)

RoHS Compliant

EAN Code:
4016032117810

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK 672/2-5
Title:	USB 2.0 Cable

ASSMANN
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1	2	3	4	5	6	7
H	G	F	E	D	C	B