


Signature	Date	Rev.
Norman Xu	Dec.20,2005	01

Revision History	Date	Rev.
For Bulk Production	Dec.20,2005	01

1 2 3 4 5 6 7


IEEEE1394b 9PIN BETA MALE  
INSULATOR:BLACK

IEEEE1394b 9PIN BETA MALE  
INSULATOR:BLACK

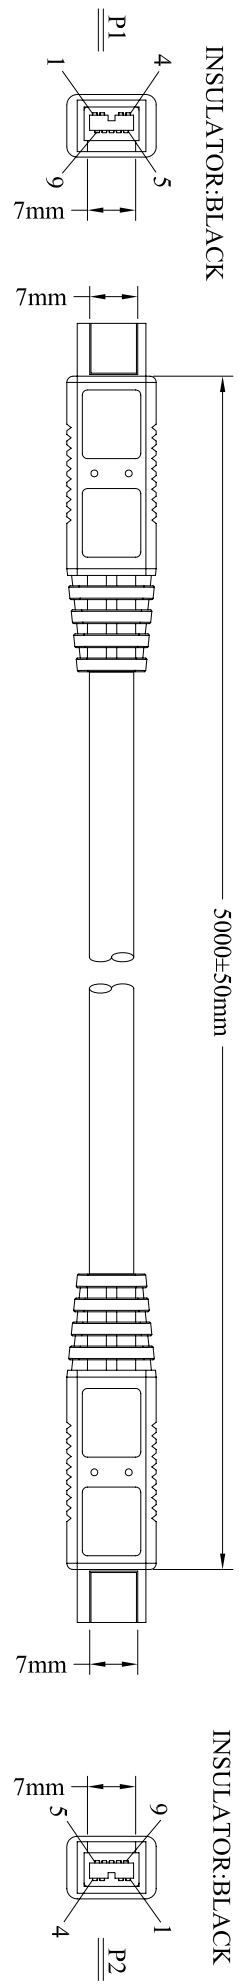

NOTES:

- CABLE: {[25AWG(7/0.18)\*1PAIR+DRAIN WIRE(7/0.127)\*2C+AL/MY+MY]\*2C +22AWG(7/0.254)\*2C+MY\*1+AL/MY+90% BRAID(24/8/0.12)}TTN  
25AWG INS:FO-SKIN ID:Ø1.5±0.02mm COLOR:RED&GREEN, BLUE&ORANGE  
22AWG INS:SR-PVC ID:Ø1.35±0.07mm COLOR:WHITE, BLACK  
PVC JACKET COLOR:BLACK OD:Ø6.9±0.2mm  
UL20276 IEEEE1394 CABLE
- CONNECTOR:  
P1&P2: IEEEE1394b 9PIN BETA MALE GOLD PLATED 15u" CONTACT  
NICKEL PLATED SHELL
- HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK.
- ELECTRICAL TEST:  
(1)100% OPEN SHORT & MIS WIRE TEST  
(2)CONTACT RESISTANCE 3 OHMS MAX.  
(3)INSULATION RESISTANCE 20M OHMS MIN.  
(4)HI-POT: DC 300V / 0.01 sec
- PACKING:SEE P-0039 REV.C PACKING DRAWING  
PACKING TYPE: DB VP4.  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

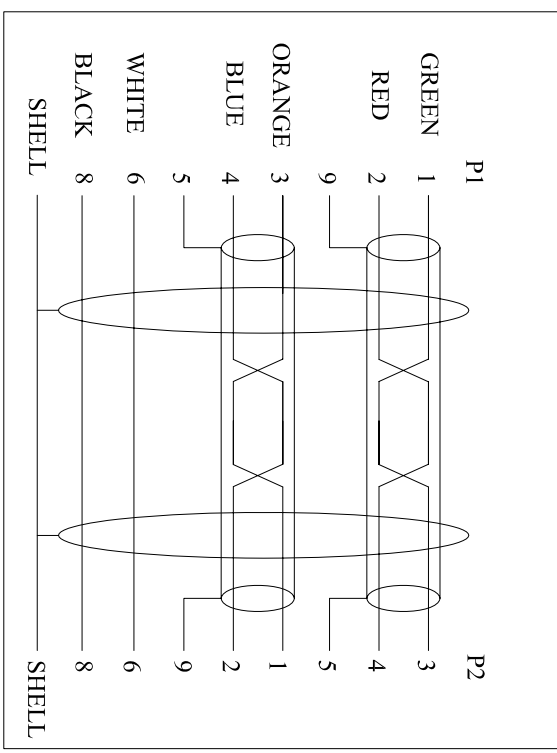

- 1
- 2
- 3
- 4
- 5
- 6
- 7

RoHS Compliant

EAN Code:  
4016032142195

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK-1394B-50
Title.	1394B 9PIN BETA TO 9PIN BETA CABLE
Scale	N/A
Unit	MM
Sheet	1/1

**ASSMANN**  
Electronic GmbH

H

G

F

E

D

C

B

A