


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec.08.2007	01


1800±30

DVI<sub>IM</sub>  
PLASTIC:BLACK

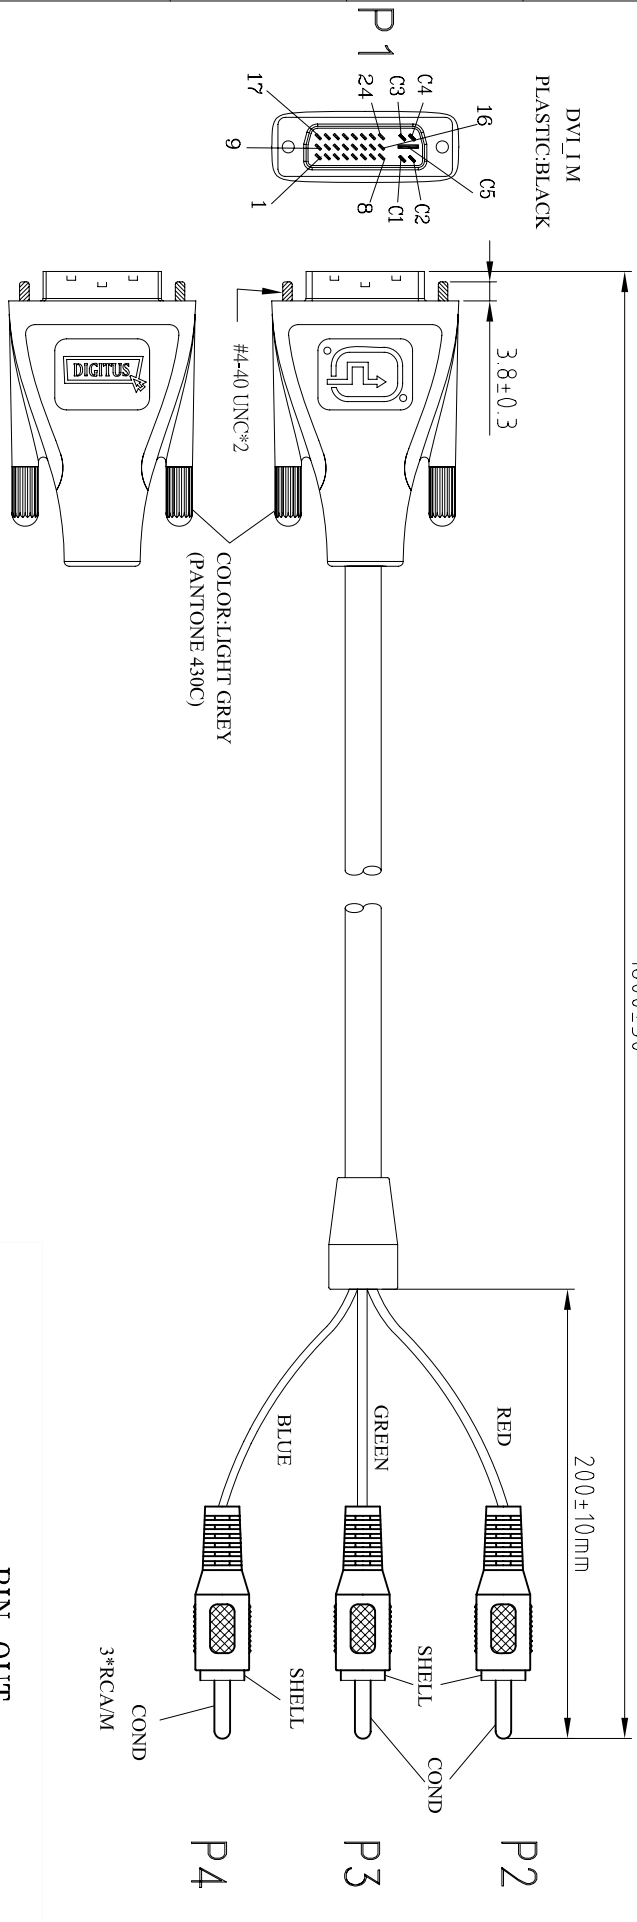

PIN OUT

DVI<sub>D/A(M)</sub>

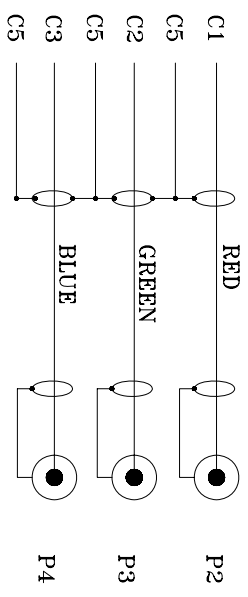

- NOTES:
- CABEL:UL-2919 28AWG(7/0.127)T.C.(COAX SPIRAL(40/0.12)T.C.75 OHMS) INSULATION:FO-PE INNER JACKET:PVC COLOR:RED, GREEN,BLUE, COAX MID-JACKET OD:Ø2.5±0.1mm AL/MYLAR-BRAID SHIELD(16/10/0.10)T.C. OUTER JACKET:PVC 70P. OD:Ø8.0±0.1mm COLOR:BLACK.
  - CONNECTOR:
    - DVI 29P: 24P+5 DIGITAL/ANALOG GOLD FLASH CONTACT NICKEL PLATED SHELL.
    - ~ P4 : RCA PLUG NICKEL PLATED CONTACT & SHELL.
    - SHEILD: P1: COPPER-FOIL 360° SOLDERED CONNECTOR SHELL & CABLE BRAID.
    - HOOD:P1:FIRST MOLD:MODED TYPE,PVC 30P,COLOR:LIGHT GREY(PANTONE 430C)  
SECOND MOLD:MODED TYPE,PVC 45P COLOR:BLACK.
  - P2: MODED TYPE, PVC 45P, COLOR: RED.
  - P3: MODED TYPE, PVC 45P, COLOR: GREEN.
  - P4: MODED TYPE, PVC 45P, COLOR: BLUE.
  - SR: MODED TYPE, PVC 45P, COLOR:BLACK.
  - THUMB SCREW:#4-40 UNC\*2PCS
  - PACKING:SEE P-0039 PACKING DRAWING(BINDING SIZE MUST BE SMALLER THAN BLISTER).

Date	Name	Part No.
Dec.08.2007	N. Xu	<b>DK-110027</b>
Checked by	A.Dan	
Approved by	T.Aulemann	

RoHS Compliant

<b>ASSMANN</b> Electronic GmbH		Title	
DVI 24+5 MALE TO3RCA(RGB) CABLE 2 COLOR MOLD WITH DIGITUS LOGO		Scale	Sheet
		N/A	1/1

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	A