

1

2

3

4



5

6


7

Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec.20,2005	01

DB9P(F)
PLASTIC:BLUE

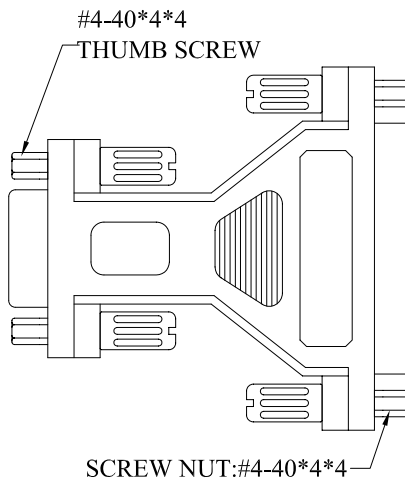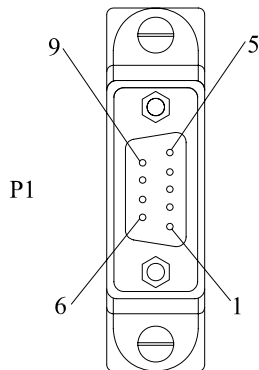

DB25P(F)
PLASTIC:BLUE

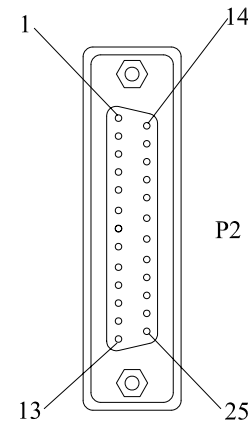

NOTES:

- 1.HOOK-UP WIRE:NON-UL 28AWG
- 2.CONNECTOR
 - P1:DB9P FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
 - P2:DB25P FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- 3.HOOD:P1&P2:MOLDED TYPE,COLOR:BEIGE.
- 4.ELECTRICAL TEST:
 - (1)100% OPEN SHORT MIS WIRE TEST.
 - (2)CONTACT RESISTANCE 3Ω MAX.
 - (3)INSULATION RESISTANCE 20MΩ MIN.
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
EAN CODE:4016032061045

<u>PIN OUT</u>			
P1	P2	P1	P2
1 ————— 8		6 ————— 6	
2 ————— 3		7 ————— 4	
3 ————— 2		8 ————— 5	
4 ————— 20		9 ————— 22	
5 ————— 7		SHELL ————— SHELL	

RoHS Compliant

	Date	Name
Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.	AB 915
Title.	

ASSMANN
Electronic GmbH

Scale	N/A	Sheet 1/1
Unit	MM	

ST81407

1

2

3

4

5

6

7