

1

2

3




4

5

6

7

Signature	Revision History	Date	Rev.
Alex Dan	For Bulk Production	Dec.20.2005	01

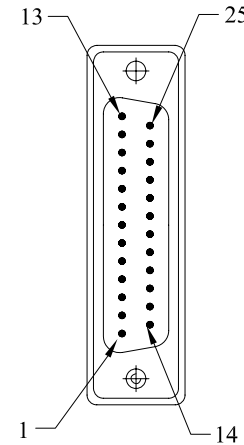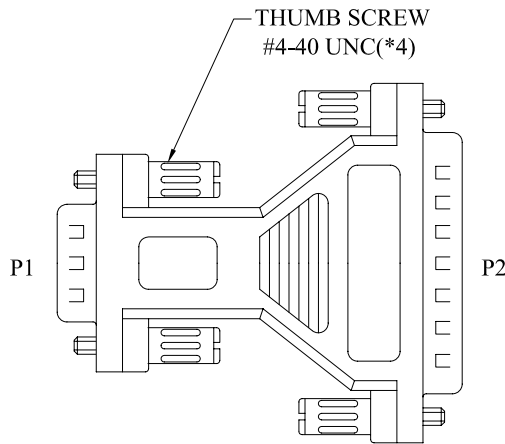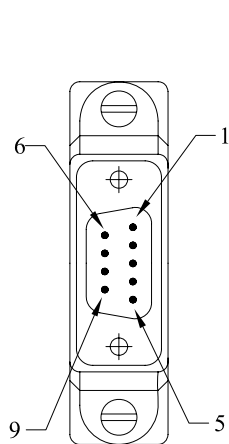

PIN OUT	
P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHELL	SHELL

NOTES:

1.HOOK UP WIRE:NON-UL 28AWG

2.CONNECTOR

P1:DB9P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

P2:DB25P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

3.HOOD:MOLDED TYPE, PVC 45P. COLOR:BEGIE.

4.ELECTRICAL TEST:

(1)100% OPEN SHORT MIS WIRE TEST.

(2)CONTACT RESISTANCE 3 OHMS MAX.

(3)INSULATION RESISTANCE 20M OHMS MIN.

5.PACKING:SEE P-0039 REV.C PACKING DRAWING

EAN CODE:4016032061014

RoHS Compliant

EAN Code: 4016032061014

ST81407

	Date	Name
Drawn by	Dec.20,2005	Alex Dan
Checked by	Dec.20,2005	Norman Xu
Approved by		

Part No.

AB 913

Title.

DB9/M-DB25/M ADAPTOR

Scale	N/A	Sheet
Unit	MM	1/1

1

2

3

4

5

6

7