







Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec:08,2007	01

USB A TYPE MALE

2000±30

USB A TYPE MALE



1 2 3 4 5 6 7

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

NOTE:

1.CABLE:UL-2725 28AWG(7/0.127)\*1PAIR INS:HD-PE+24AWG(7/0.203)\*2C

INS:SR-PVC+AL-FOIL/MYLAR+DRAIN WIRE+BRAID(65%) PVC JACKET,

OD:4.7±0.15mm COLOR:BLACK, REV 2.0.

2.CONNECTOR:

P1&P2:USB A TYPE MALE GOLD PLATED 30μ" CONTACT,

NICKEL PLATED SHELL REV 2.0.

3.HOOD:FIRST MOLD:MOLDED TYPE,PVC 30P ,COLOR:LIGHT GREY(PANTONE 430C)

SECOND MOLD:MOLDED TYPE,PVC 45P COLOR:BLACK.

4.ELECTRICAL TEST:


<1>.100% OPEN SHORT & MIS WIRE TEST

<2>.CONTACT RESISTANCE 3 OHM MAX

<3>.INSULATION RESISTANCE 10M OHM MIN

5.PACKING:SEE P-0039 PACKING DRAWING

(BINDING SIZE MUST BE SMALLER THAN BLISTER)

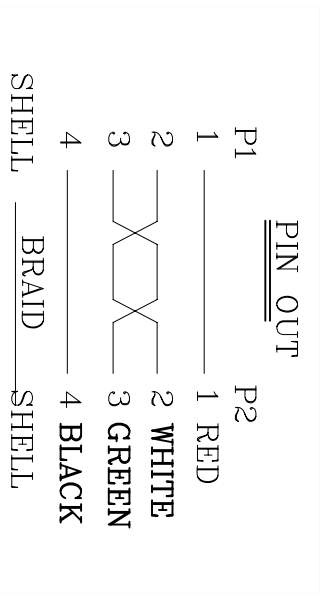

Date	Name
Dec:08,2007	N. Xu
Checked by	Aldan
Dec:08,2007	
Approved by	T.Aulemann
Dec:08,2007	

Part No.	DK-112018
Title	USB AM TO AM CABLE REV2.0 2 COLOR MOLD WITH DIGITUS LOGO

<b>ASSMANN</b> Electronic GmbH		Scale	N/A	Sheet	1/1
STR1407		Unit	MM		

RoHS Compliant

1 2 3 4 5 6 7