


Signature	Date	Rev.
Norman Xu	Dec.20,2005	01

Revision History	Date	Rev.
For Bulk Production	Dec.20,2005	01

A
IEEEE1394b 9PIN BETA MALE
INSULATOR:BLACK


3000±30mm

A
IEEEE1394b 9PIN BETA MALE
INSULATOR:BLACK

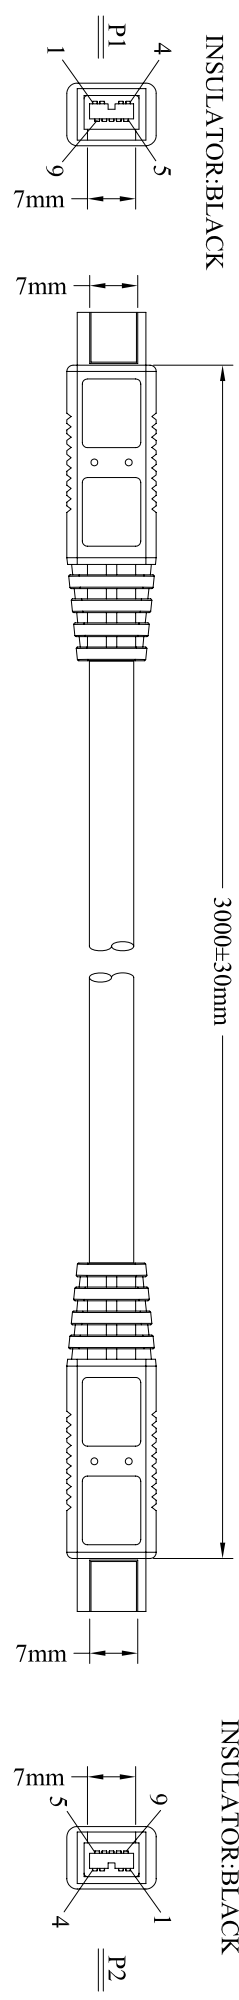

NOTES:

1. CABLE: {[25AWG(7/0.18)*1PAIR+DRAIN WIRE(7/0.127)*2C+AL/MY+MY]*2C +22AWG(7/0.254)*2C+MY*1+AL/MY+90% BRAID(24/8/0.12)}TTN
25AWG INS:FO-SKIN ID:Ø1.5±0.02mm COLOR:RED&GREEN, BLUE&ORANGE
22AWG INS:SR-PVC ID:Ø1.35±0.07mm COLOR:WHITE, BLACK
PVC JACKET COLOR:BLACK,OD:Ø6.9±0.2mm
UL20276 IEEEE1394 CABLE
- 2.CONNECTOR:
P1&P2: IEEEE1394b 9PIN BETA MALE GOLD PLATED 15u" CONTACT
NICKEL PLATED SHELL

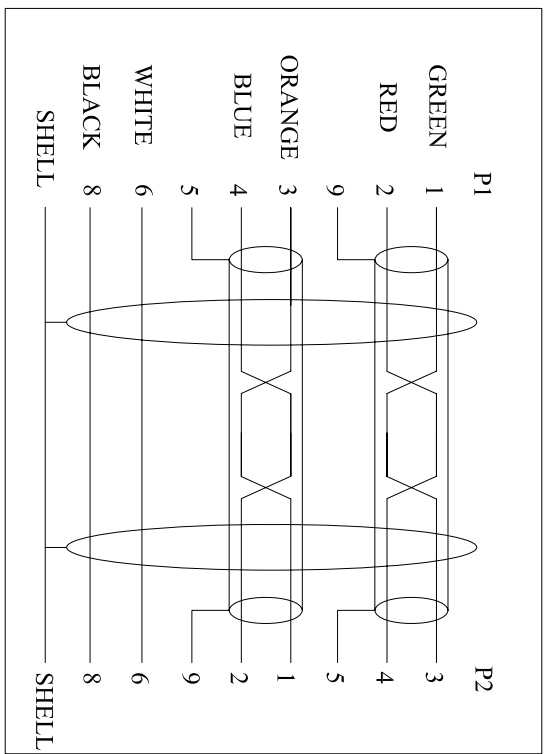

- 3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK.
- 4.ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST
(2)CONTACT RESISTANCE 3 OHMS MAX.
(3)INSULATION RESISTANCE 20M OHMS MIN.
(4)HI-POT: DC 300V / 0.01 sec
- 5.PACKING:SEE P-0039 REV.C PACKING DRAWING
PACKING TYPE: DB VP4.
(HANKING SIZE MUST BE SMALLER THAN PACKING)

RoHS Compliant

EAN Code:
4016032142188

Drawn by	Dec.20,2005	Norman Xu
Checked by	Dec.20,2005	Alex Dan
Approved by		

Part No.	AK-1394B-30
Title.	1394B 9PIN BETA TO 9PIN BETA CABLE
Scale	N/A
Unit	MM
Sheet	1/1

ASSMANN
Electronic GmbH

1	2	3	4	5	6	7
1	2	3	4	5	6	7