


Signature	Revision History	Date	Rev.
N.Xu	For Bulk Production	Dec:08,2007	01

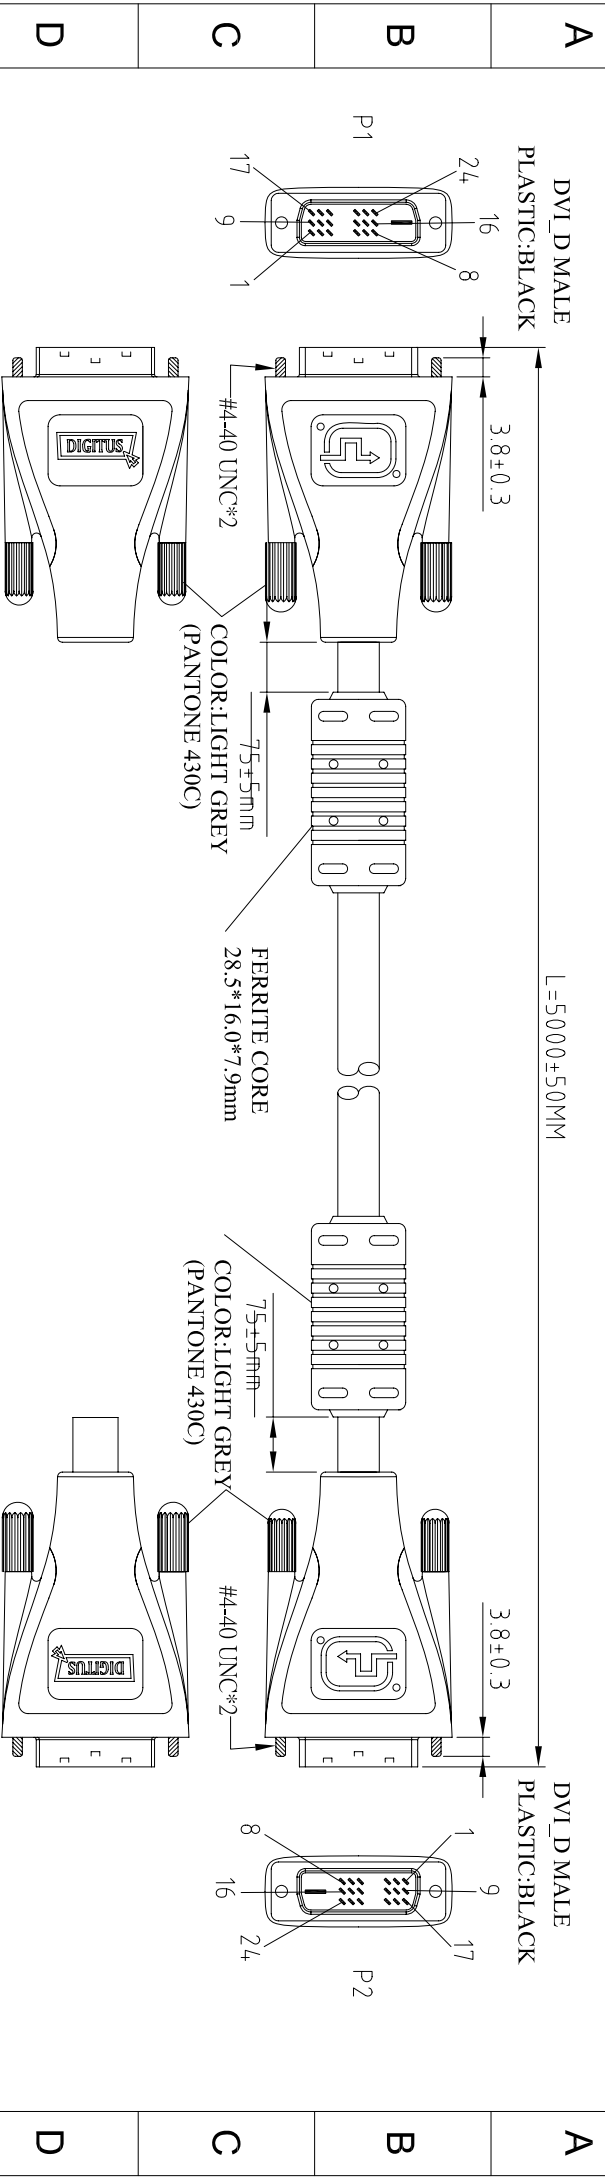

NOTE:

- CABLE: UL20276 { [28AWG(7/0.127)*1PAIR+DRAIN WIRE+MY+AL/MY]*4C+28AWG(7/0.127)*1PAIR+28AWG(7/0.127)*3C+AL/MYLAR+DRAIN WIRE(7/0.127)+85% BRAID } T.C
PVC JACKET, OD: $7.3 \pm 0.2 \text{mm}$ COLOR: BLACK.
- CONNECTOR:
P1&P2: DVI 19P: 18P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL
- SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- HOOD: FIRST MOLD: MOLDED TYPE, PVC 30P, COLOR: LIGHT GREY (PANTONE 430C)
SECOND MOLD: MOLDED TYPE, PVC 45P, COLOR: BLACK.
- PACKAGING: SEE P-0039 PACKING DRAWING (BINDING SIZE MUST BE SMALLER THAN BLISTER)

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H

RoHS Compliant

Part No.		DK-110010
Drawn by	Name	
Dec:08,2007	N. Xu	
Checked by	A.Dan	
Dec:08,2007		
Approved by	T.Aulemann	
Dec:08,2007		

ASSMANN
Electronic GmbH

Title: DVI 18+1 MALE TO DVI 18+1 MALE CABLE
2COLOR MOLD WITH DIGITUS LOGO

Scale: N/A
Unit: MM

Sheet: 1/2

STR1407

